

MATERIALS:

Circuits: 06 to 68 pin.

Insulator: P.B.T. 30% Glass Fiber, UL94V-0.

Color: Black.

Contact Material: Phosphor Bronze, Gold flash over Nickel.

ELECTRICAL:





Current Rating : 1 AMP.

Insulation Resistance: 1000MΩ MIN.


Dielectric Withstanding: 500 VAC.

Operating Temperature: -45℃ ~ +85℃


所有材料為
"環保材料"
2006.7.06
RoHS

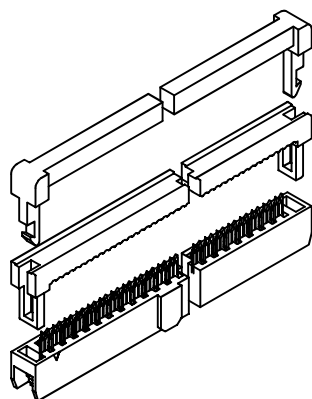


2.0*N0.of Contacts/2+5.25±0.2

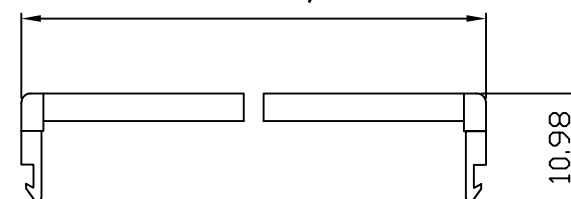


2.0*N0.of Contacts/2+5.25±0.2

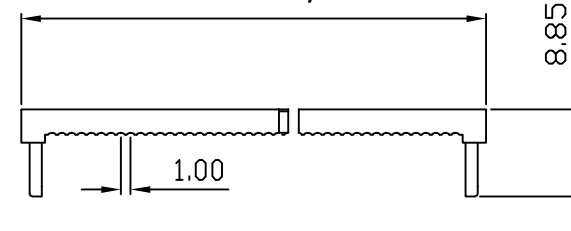

2.0*N0.of Contacts/2+5.25±0.2

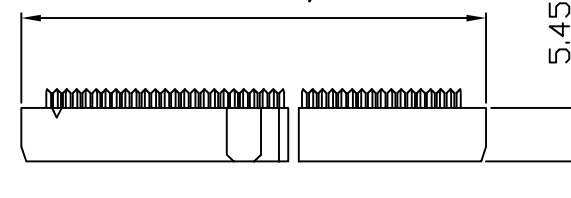

2.0*N0.of contacts/2-2.0±0.1

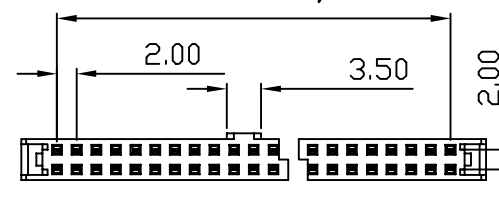

FLYING
INTERNATIONAL

DESCRIPTION:

IDC 2.0mm 三件式

DRAWN:

MIMI

CHECKED:

MANDY

APPROVAL:

JOHNNY

GENERAL TOLERANCE:

± 0.2

SCALE:



REV:

R3

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV:

R0

R1

R2

R3

DESCRIPTION

RELEASE

導入RoHS

變更環保字樣

2009圖面版本更新

DATE

2004.10.06

2006.07.06

2006.08.15

2009.09.07