



7		8	
REV.	BCN NO.	REVISED	DATE

NOTE:

1. MATERIAL:

- a. HOUSING: PBT
- b. CONTACT: PHOSPHOR BRONZE
(SURFACE PLATING: SN100u")

SEE ORDERING INFORMATION

2. ELECTRIC:

- a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c. DIELECTRIC VOLTAGE: 750V AC ONE SEC LEVEL
- d. OPERATING TEMPERATURE: -25° C ~ +85° C

ORDERING INFORMATION

F-05-A*003**

電池盒系列

F-5系列

DIP 90° TYPE

PLATING:

A-Au1U"
J-Ni100U"~120U"
K-SN100U"~120U"



MATERIAL:

1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

工程部

2015. 2. 27

ZhouRuiCai

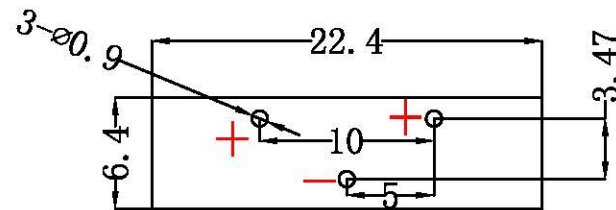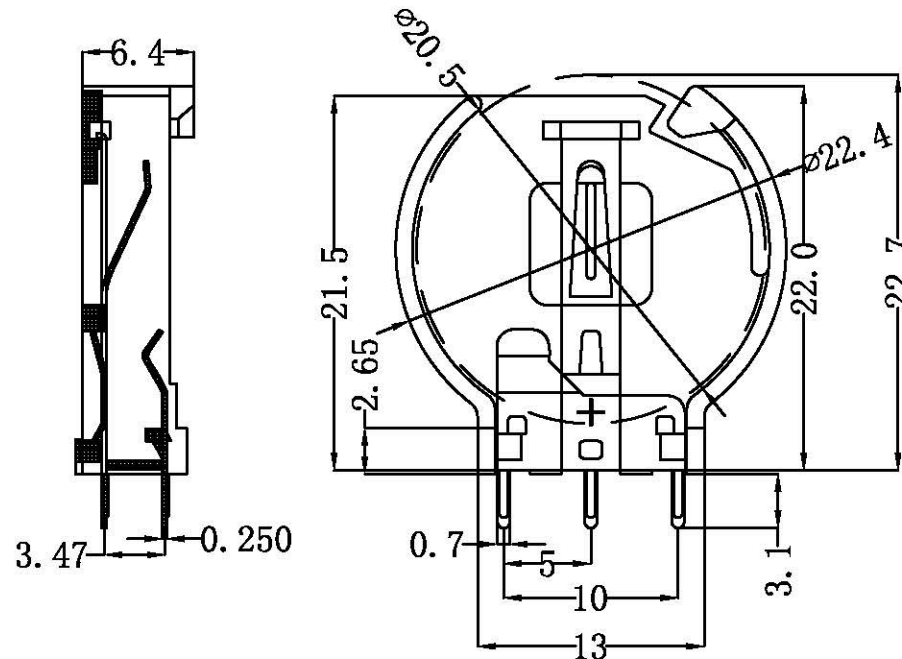

PCB Layout Diagram
Top View

3	TERMINAL (-)	1	PHOSPHOR BRONZE, T=0.25MM	Sn-Plating
2	TERMINAL (+)	1	PHOSPHOR BRONZE, T=0.25MM	Sn-Plating
1	HOUSING	1	PBT	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		FLYING 汎翊國際有限公司 INTERNATIONAL			
DECIMALS:	ANGLES:	SCALE: 1:1	SIZE: A4	VIEW:	PART NO:
X : ±0.30	X : ±1°	UNIT: mm	REV.: A/0	OBJECT: MY	F-05-A1AK003
X.X : ±0.25	X.X : ±0.5°	DSND	YangFeng	DATE	2015. 02. 10
X.XX : ±0.20		CHKD	ZhouRuicai	DATE	2015. 02. 26
X.XXX : ±0.10		APVD	XueZhengy	DATE	2015. 02. 26
WEIGHT: 1.7 g		TITLE: F-2032-5-3			
SHEET 1 OF 1					