



REV.	ECN NO.	REVISED	DATE

1.MATERIAL:

- a.HOUSING:PBT UL94V-0
b.CONTACT:PHOSPHOR BRONZE
(SURFACE PLATING:Si 3u")

SEE ORDERING INFORMATION

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
d.OPERATING TEMPERATURE: -25°C~ +85°C

ORDERING INFORMATION

F-12-A***002-Z

電池座系列

F-12系列





DIP 90° TYPE

PLATING:


A-Au1U"
J-Ni100U"~120U"
K-Sn100U"~120U"
M-Si3U"~Ni10U"

MATERIAL:

1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

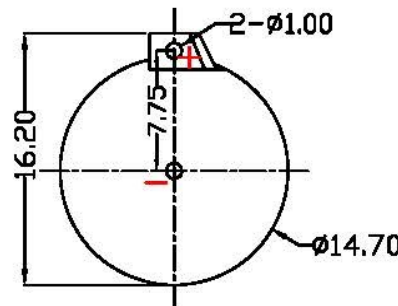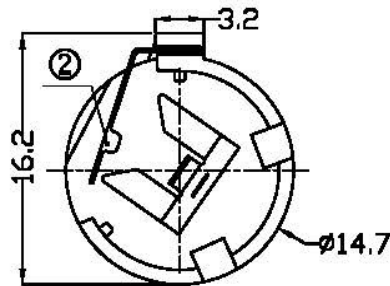

PCB Layout Diagram
Top View

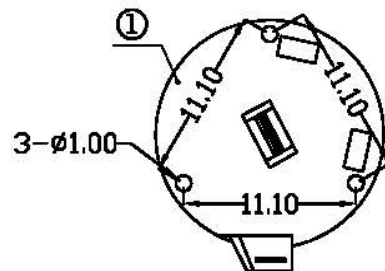

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20mm	Silver plating and nickel plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.20mm	Silver plating and nickel plating
1	HOUSING	1	PBT	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES		FLYING 汎翊國際有限公司 INTERNATIONAL			
DECIMALS:	ANGLES:	DSND YangFeng	DATE	2017-12-20	TITLE:
X .X ±0.30	X ° ±1°	CHKD ZhouRuicai	DATE	2017-12-20	F-1220-1-Z Si DIP 正向
X.X ±0.25	X.X ±0.5°	APVD XueShunyong	DATE	2017-12-20	PART NO.:
X.XX ±0.20		SCALE: 2:1	SIZE: A4	VIEW: ④ ⑤	F-12-A1AM002-Z
X.XXX ±0.10		UNIT: mm	REV.: A/0	OBJECT: MY	DRAW NO.:WD-CP-0005
WEIGHT: 0.40g		SHEET 1 OF 1			