
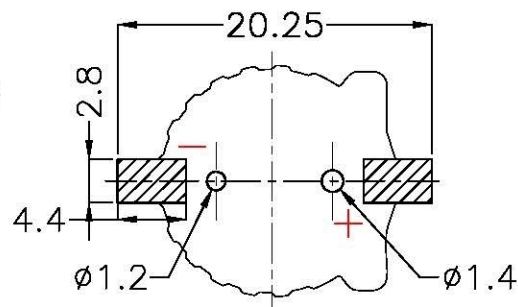
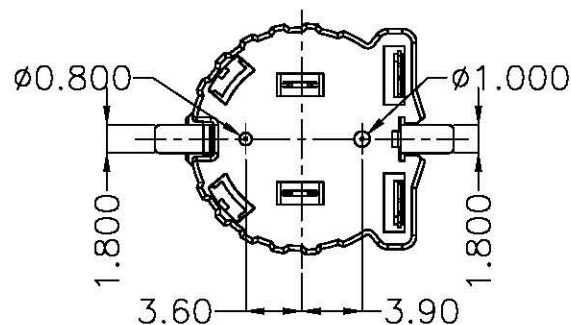

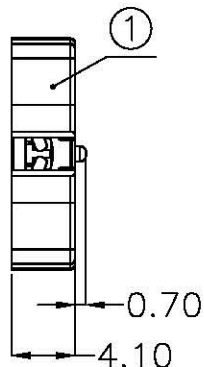


7		8	
REV.	ECN NO.	REVISED	DATE

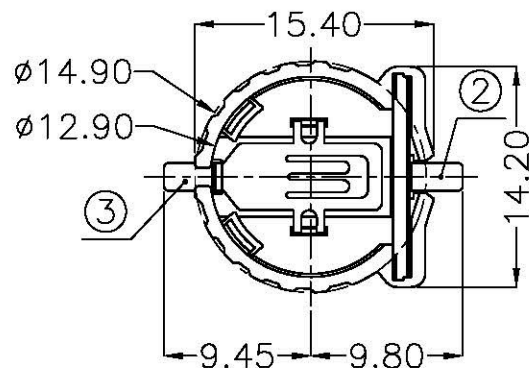

PCB Layout Diagram Top View

1.MATERIAL:

a.HOUSING:PPS UL94V-0
b.CONTACT:PHOSPHOR BRONZE
(SURFACE PLATING: Au1u")

SEE ORDERING INFORMATION

2.ELECTRIC:

a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
d.OPERATING TEMPERATURE: -25°C~ +85°C

ORDERING INFORMATION

F -12-B***008

電池座系列

F-12系列

SMT 180° TYPE

— PLATING:

A-A₁₁1U^W

J-Ni100U^{''}~120U^{''}

K-Sn100Uⁿ~120Uⁿ

— MATERIAL:

1A-PBT BLACK

1B-PA66 BLACK

2A-PPA BROWN

2B-PPA BLACK

3A-PPS BROWN

3B-PPS BLACK

4A-LCP WHITE

4B-LCP BLACK

工程部

2017-06-28

ZW DANG

3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
1	HOUSING	1	PPS	BROWN
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		FLYING 汎翊國際有限公司 INTERNATIONAL						
DECIMALS: X ±0.30 X.X ±0.25 X.XX ±0.20 X.XXX ±0.10		ANGLES: X ±1° X.X ±0.5°		DSND	YangFeng	DATE	2017-06-28	TITLE: F-1220-2 PPS SMT 负极加宽
		CHKD	ZhouRuicai	DATE	2017-06-28			
		APVD	XueShunyang	DATE	2017-06-28	PART NO.:		
WEIGHT: 0.63g		SCALE: 2:1		SIZE: A4		VIEW: 		F-12-B3AA008
SHEET 1 OF 1		UNIT: mm		REV.: A/0		OBJECT: MY		DRAW NO.:MY-CP-0055