
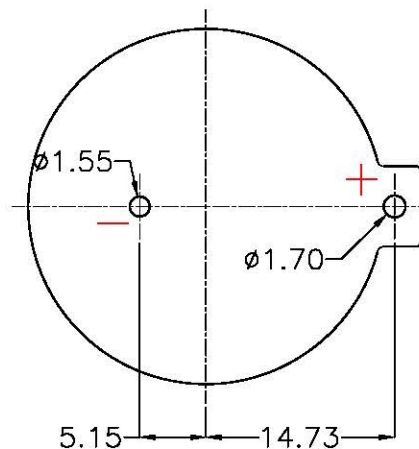
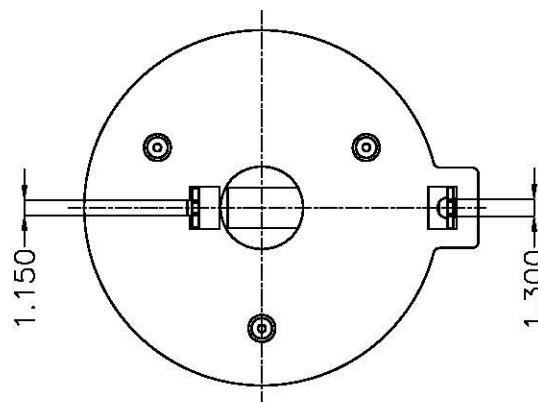
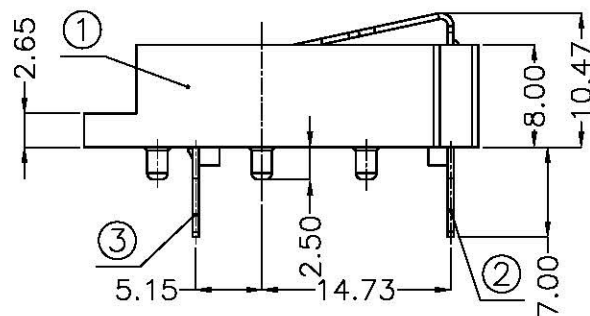


7		8	
REV.	ECN NO.	REVISED	DATE

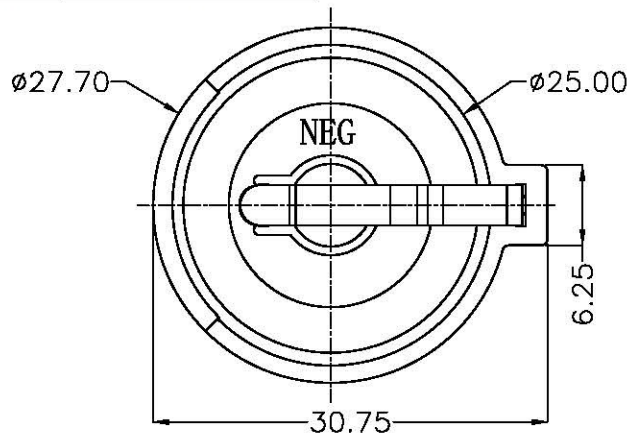

PCB Layout Diagram

Top View

NOTE:

- 1.MATERIAL:
a.HOUSING:PBT
b.CONTACT:Mn Steel
(SURFACE PLATING: Ni100u"—120u")
SEE ORDERING INFORMATION
- 2.ELECTRIC:
a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
c.DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL
d.OPERATING TEMPERATURE: -25°C ~ +85°C

ORDERING INFORMATION

F -24-A***009

電池座系列

F-24系列

DIP 90° TYPE

— PLATING:
A—Au1U"
J—Ni100U"~120U"
K—Sn100U"~120U"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

工程部

2017-07-17

ZW DANG

3	TERMINAL(-)	1	Mn Steel,T=0.50mm	Ni Plating
2	TERMINAL(+)	1	Mn Steel,T=0.50mm	Ni Plating
1	HOUSING	1	PBT	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		FLYING 汎翊國際有限公司 INTERNATIONAL			
DECIMALS: X .±0.30 X .±1° X.X ±0.25 X.X ±0.5° X.XX ±0.20 X.XXX ±0.10	DSND	YangFeng	DATE	2017-07-17	TITLE:
	CHKD	ZhouRuicai	DATE	2017-07-17	F-2477-2 DIP
	APVD	XueShunyong	DATE	2017-07-17	PART NO.:
WEIGHT: 3.41g	SCALE: 2:1	SIZE: A4	VIEW: 	F-24-A1AJ009	
SHEET 1 OF 1	UNIT: mm	REV.: A/0	OBJECT: MY	DRAW NO.:MY-CP-0036	