



7		8	
REV.	ECN NO.	REVISED	DATE

NOTE:

1. MATERIAL:

- a. HOUSING: THERMOPLASTIC GLASS FIBRE UL94V-0
- b. CONTACT: PHOSPHOR BRONZE
(SURFACE PLATING: A*U*)

SEE ORDERING INFORMATION

2. ELECTRIC:

- a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c. DIELECTRIC VOLTAGE: 750V AC ONE SEC LEVEL
- d. OPERATING TEMPERATURE: -25° C ~ +85° C

ORDERING INFORMATION

F-24-B***006

電池座系列

F-24系列



SMT 180° TYPE

PLATING:

A-Au1U*
J-Ni100U*~120U*
K-SN100U*~120U*

MATERIAL:

1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

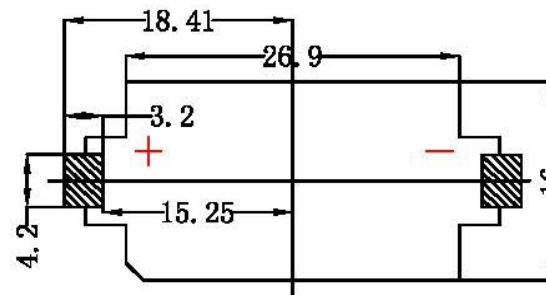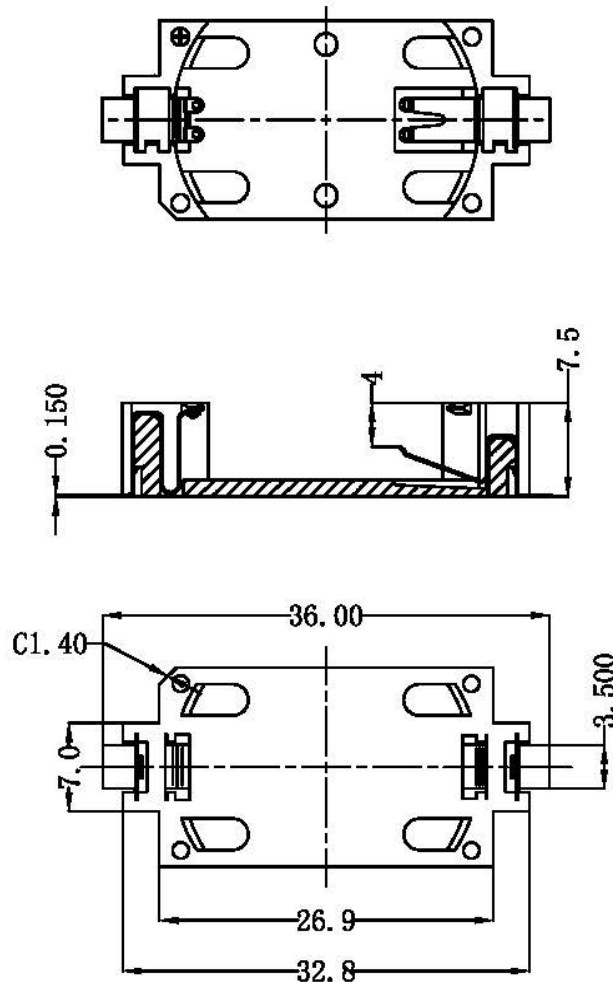

PCB Layout Diagram
Top View

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
3	TERMINAL (-)	1	PHOSPHOR BRONZE, T=0.15MM	Gold Plating and Ni Under-Plating
2	TERMINAL (+)	1	PHOSPHOR BRONZE, T=0.15MM	Gold Plating and Ni Under-Plating
1	HOUSING	1	LCP	WHITE

UNLESS OTHERWISE SPECIFIED TOLERANCES	
DECIMALS:	ANGLES:
X : ±0.30	X : ±1°
X.X : ±0.25	X.X : ±0.5°
X.XX : ±0.20	
X.XXX : ±0.10	
WEIGHT:	1.7g
SHEET	1 OF 1

FLYING 汎翊國際有限公司 INTERNATIONAL			
SCALE: 1:1	SIZE: A4	VIEW:	PART NO:
UNIT: mm	REV.: A/O	OBJECT: MY	F-24-B4AA006
DSND	YangFeng	DATE	2014. 11. 3
CHKD	ZhouRuicai	DATE	2014. 11. 3
APVD	XueZhengy	DATE	2014. 11. 3
TITLE:			
F-2450-2 SMT			