



7		8	
REV.	ECN NO.	REVISED	DATE

NOTE:

1. MATERIAL:

a. HOUSING: PA66

b. CONTACT: PHOSPHOR BRONZE

(SURFACE PLATING: Sn100u")

SEE ORDERING INFORMATION

2. ELECTRIC:

a. CONTACT RESISTANCE: 30 MILLIOHMS MAX

b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN

c. DIELECTRIC VOLTAGE: 750V AC ONE SEC LEVEL

d. OPERATING TEMPERATURE: -25° C ~ +85° C

ORDERING INFORMATION

F-24-B***007

電池座系列

F-24系列

SMT 180° TYPE

PLATING:

A-Au1U"

J-Ni100U"~120U"

K-SN100U"~120U"

MATERIAL:

1A-PBT BLACK

1B-PA66 BLACK

2A-PPA BROWN

2B-PPA BLACK

3A-PPS BROWN

3B-PPS BLACK




4A-LCP WHITE

4B-LCP BLACK

工程部

2011. 2. 22

ZhouRuiCai

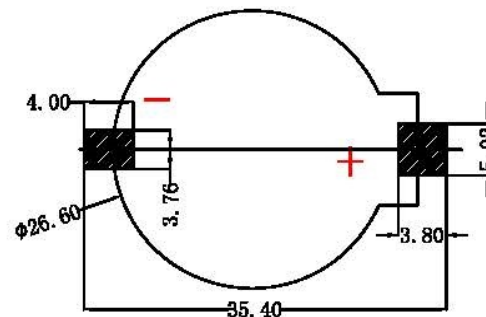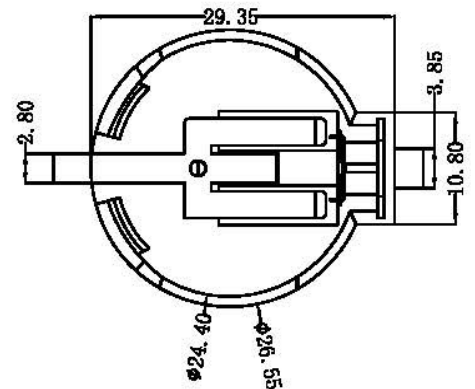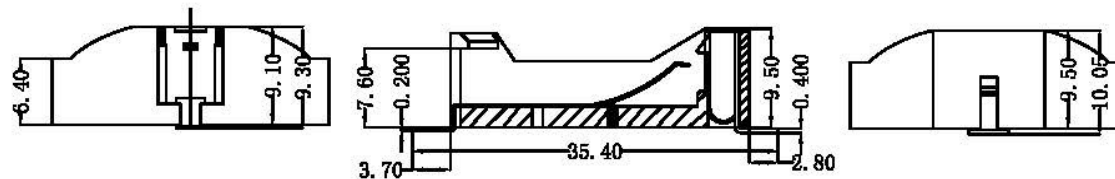

PCB Layout Diagram

Top View

3	TERMINAL (-)	1	PHOSPHOR BRONZE, T=0.20MM	Sn-Plating
2	TERMINAL (+)	1	PHOSPHOR BRONZE, T=0.40MM	Sn-Plating
1	HOUSING	1	PA66	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		FLYING 汎翊國際有限公司			
DECIMALS:		SCALE: 1:1		VIEW:	
ANGLES:		SIZE: A4		PART NO:	
X : ±0.30		UNIT: mm		REV.: A/O	
X.X : ±0.25		DATE		OBJECT: MY	
X.XX : ±0.20		DATE		TITLE:	
X.XXX : ±0.10		DATE		F-2450-3 SMT	
WEIGHT: 2.0g		APVD		XueZhengy	
SHEET 1 OF 1		XueZhengy		DATE	