



REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

a.HOUSING:PBT

b.CONTACT:Mn Steel

(SURFACE PLATING: Ni 100u"-120u")

SEE ORDERING INFORMATION

2.ELECTRIC:

a.CONTACT RESISTANCE: 30 MILLIOHMS MAX

b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN

c.DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL

d.OPERATING TEMPERATURE: -25°C~ +85°C

ORDERING INFORMATION

F-24-A***001

電池座系列

F-24系列

DIP 90° TYPE

PLATING:

A-Au1U"

J-Ni100U"~120U"

K-Sn100U"~120U"

MATERIAL:

1A-PBT BLACK

1B-PA66 BLACK

2A-PPA BROWN

2B-PPA BLACK

3A-PPS BROWN

3B-PPS BLACK





4A-LCP WHITE

4B-LCP BLACK

工程部

2017-07-16

ZW DANG

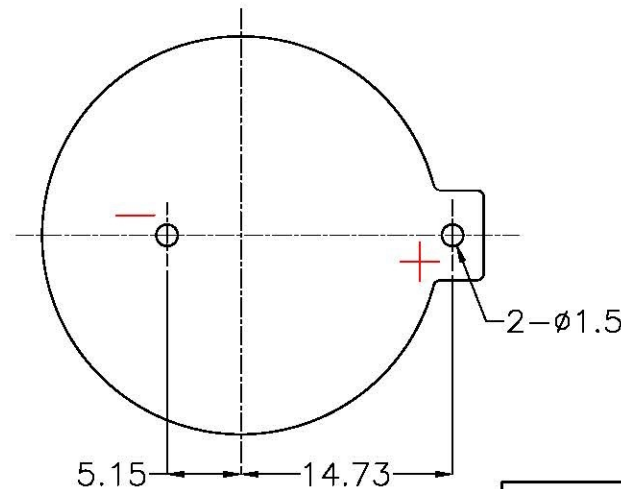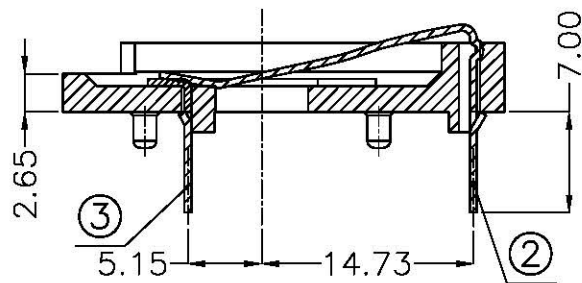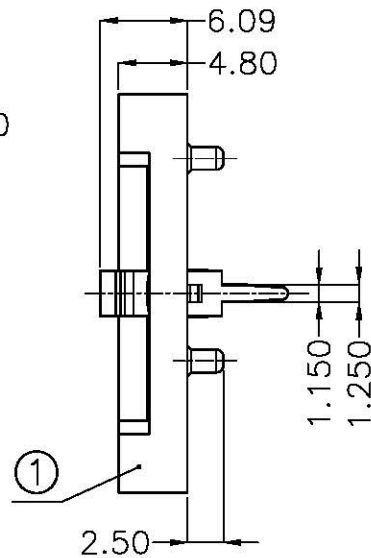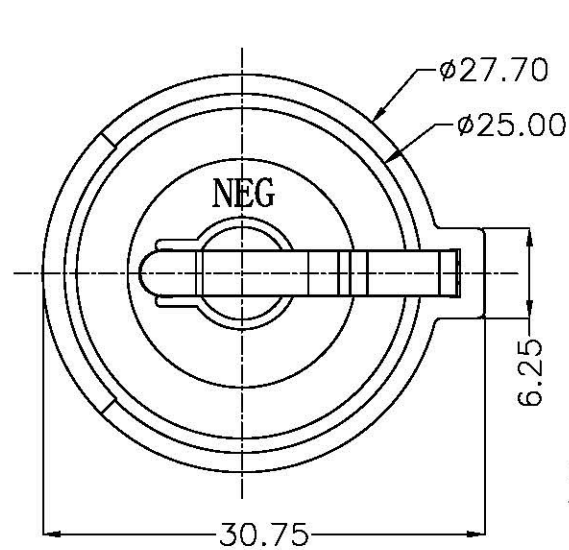

PCB Layout Diagram
Top View

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
3	TERMINAL(-)	1	Mn Steel, T=0.50mm	Ni Plating
2	TERMINAL(+)	1	Mn Steel, T=0.50mm	Ni Plating
1	HOUSING	1	PBT	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES		FLYiNG 汎翊國際有限公司 INTERNATIONAL						
DECIMALS: X ±0.30 X.X ±0.25 X.XX ±0.20 X.XXX ±0.10		ANGLES: X ±1° X.X ±0.5°		DSND	YangFeng	DATE	2017-07-16	TITLE:
WEIGHT: 2.92g		CHKD		ZhouRuicai	DATE	2017-07-16	F-2430-1 DIP	
		APVD		XueShunyong	DATE	2017-07-16	PART NO.:	
		SCALE: 2:1		SIZE: A4	VIEW: 	F-24-A1AJ001		
SHEET 1 OF 1		UNIT: mm		REV.: A/0		OBJECT: MY		DRAW NO.:MY-CP-0035