



REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

a.HOUSING:PA66

b.CONTACT:BRASS

(SURFACE PLATING: Ni 100u"-120u")

SEE ORDERING INFORMATION

2.ELECTRIC:

a.CONTACT RESISTANCE: 30 MILLIOHMS MAX

b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN

c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL

d.OPERATING TEMPERATURE: -25°C~ +85°C

ORDERING INFORMATION

F-05-A***001

電池盒系列

F-05系列

DIP 90° TYPE

PLATING:

A-Au1U"

J-Ni100U"~120U"

K-Sn100U"~120U"

MATERIAL:

1A-PBT BLACK

1B-PA66 BLACK

2A-PPA BROWN

2B-PPA BLACK

3A-PPS BROWN

3B-PPS BLACK





4A-LCP WHITE

4B-LCP BLACK


工程部

2017-07-12

ZW DANG

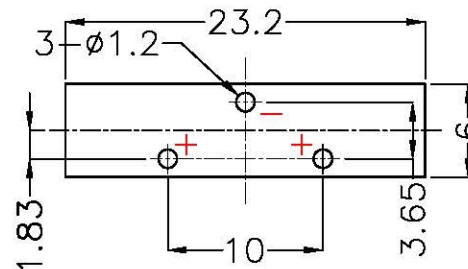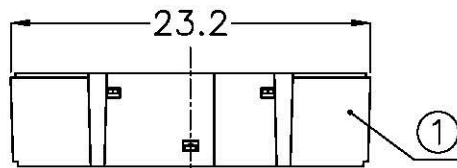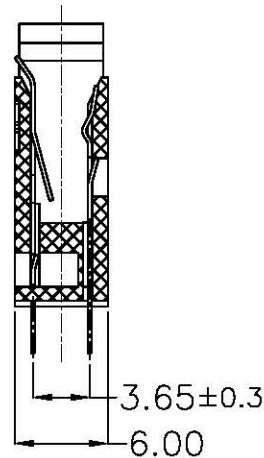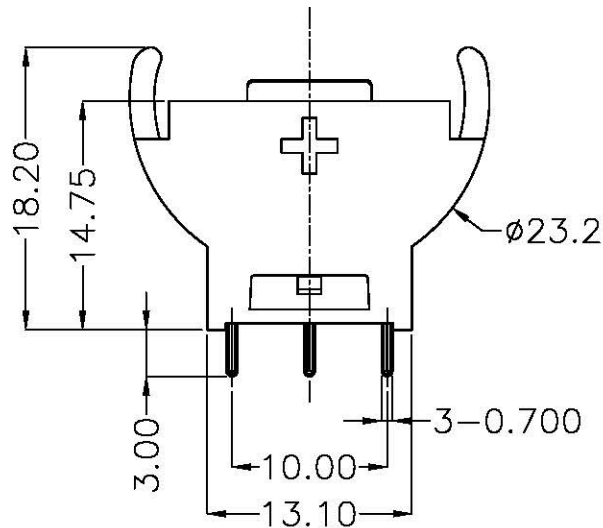

PCB Layout Diagram
Top View

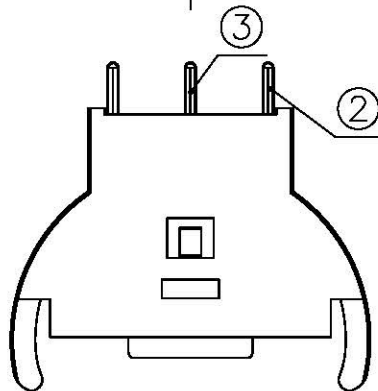

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
3	TERMINAL(-)	1	BRASS, T=0.25mm	Ni Plating
2	TERMINAL(+)	1	BRASS, T=0.25mm	Ni Plating
1	HOUSING	1	PA66	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES		FLYING 汎翊國際有限公司 INTERNATIONAL			
DECIMALS:	ANGLES:	DSND	YangFeng	DATE	2017-07-12
X :±0.30	X :±1°	CHKD	ZhouRuicia	DATE	2017-07-12
X.X :±0.25	X.X :±0.5°	APVD	XueShunYong	DATE	2017-07-12
X.XX :±0.20					
X.XXX :±0.10					
WEIGHT:	1.64g	SCALE:	2:1	SIZE:	A4
SHEET	1 OF 1	UNIT:	mm	REV.:	A/0
		VIEW:	☉ ☐	OBJECT:	MY