


7		8	
REV.	ECN NO.	REVISED	DATE

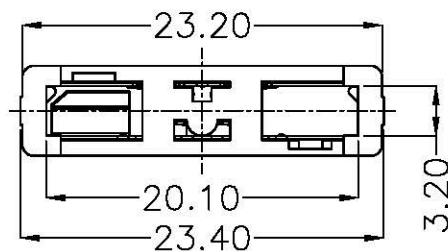

NOTE:


1.MATERIAL:
a.HOUSING:PBT
b.CONTACT:PHOSPHOR BRONZE
(SURFACE PLATING: Sn 100u"—120u")
SEE ORDERING INFORMATION

2.ELECTRIC:

a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
d.OPERATING TEMPERATURE: -25°C~ +85°C

ORDERING INFORMATION

F -05-A***002

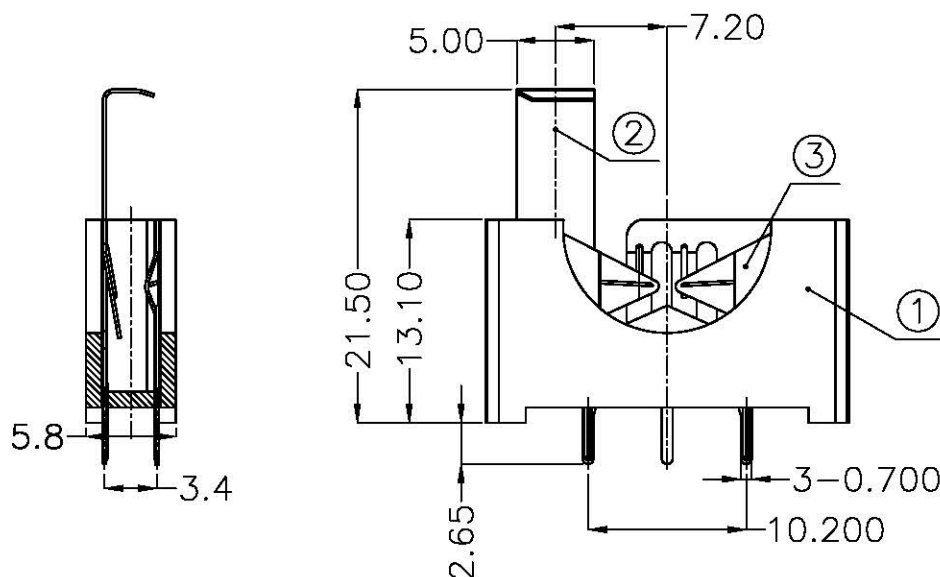


電池盒系列

F-05系列

DIP 90° TYPE

— PLATING:
A-Au1U"
J-Ni100U"~120U"
K-Sn100U"~120U"

— MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

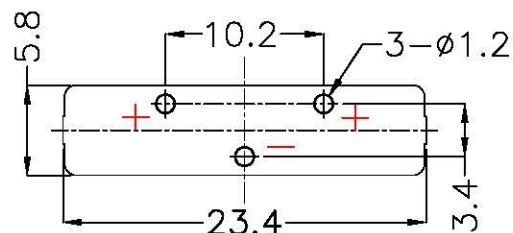

PCB Layout Diagram

Top View

3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20mm	Sn Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.20mm	Sn Plating
1	HOUSING	1	PBT	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		FLYiNG INTERNATIONAL		汎翊國際有限公司	
DECIMALS: X ±0.30 X.X ±0.25 X.XX ±0.20 X.XXX ±0.10		ANGLES: X ±1° X.X ±0.5°		DSND YangFeng	DATE 2017-07-12
WEIGHT: 1.65g		CHKD ZhouRuicai	DATE 2017-07-12	TITLE: F-2032-5-2 Sn DIP	
		APVD XueShunyang	DATE 2017-07-12	PART NO.:	
SHEET 1 OF 1		SCALE: 2:1	SIZE: A4	VIEW: 	F-05-A1AK002
		UNIT: mm	REV.: A/0	OBJECT: MY	DRAW NO.: MY-CP-0024