



REV.	ECN NO.	REVISED	DATE

NOTE:

1. MATERIAL:

- a. HOUSING: THERMOPLASTIC GLASS FIBRE UL94V-0
 - b. CONTACT: PHOSPHOR BRONZE
(SURFACE PLATING: Sn 100u")
- SEE ORDERING INFORMATION

2. ELECTRIC:

- a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c. DIELECTRIC VOLTAGE: 750V AC ONE SEC LEVEL
- d. OPERATING TEMPERATURE: -25° C ~ +85° C

ORDERING INFORMATION

F-05-A***004

電池盒系列

F-5系列

DIP 90° TYPE

PLATING:

A-Au10"
J-Ni100u"~120u"
K-SN100u"~120u"




MATERIAL:

1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

工程部

2014. 11. 4

ZhouRuiCai

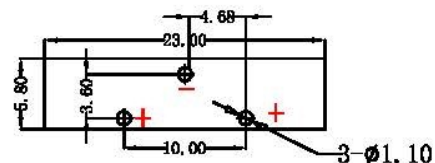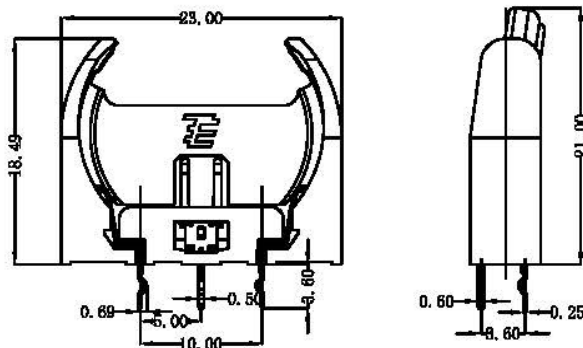

PCB Layout Diagram
Top View

3	TERMINAL (-)	1	PHOSPHOR BRONZE, T=0.25MM	SN-Plating
2	TERMINAL (+)	1	PHOSPHOR BRONZE, T=0.25MM	SN-Plating
1	HOUSING	1	PBT	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES	
DECIMALS: X : ±0.30 X.X : ±0.25 X.XX : ±0.20 X.XXX : ±0.10	ANGLES: X : ±1° X.X : ±0.5°
WEIGHT: 0.68 g	
SHEET 1 OF 1	

FLYING 汎翊國際有限公司
INTERNATIONAL

SCALE: 1:1	SIZE: A4	VIEW:	PART NO:
UNIT: mm	REV.: A/0	OBJECT: MY	F-05-A1AK004
DSND	YangFeng	DATE	2014. 11. 3
CHKD	ZhouRuicai	DATE	2014. 11. 3
APVD	XueZhengy	DATE	2014. 11. 3
TITLE:		F-2032-5-4	