


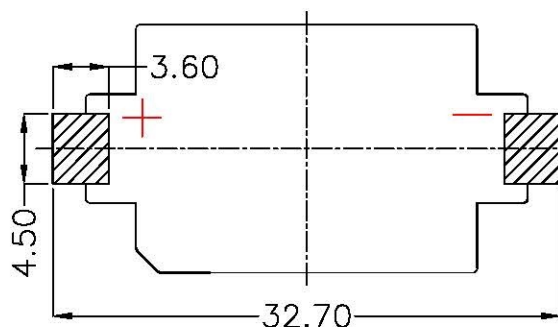
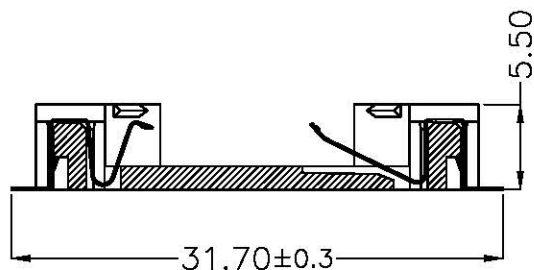




7		8	
REV.	ECN NO.	REVISED	DATE

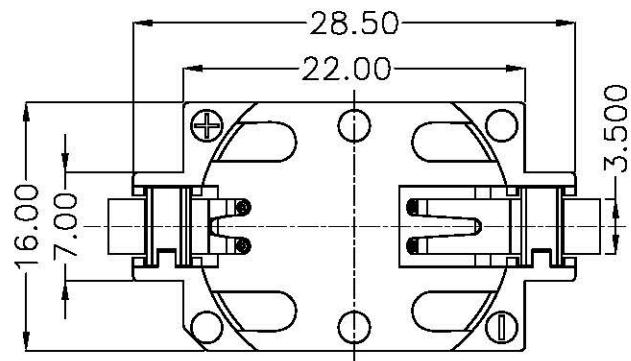

PCB Layout Diagram
Top View

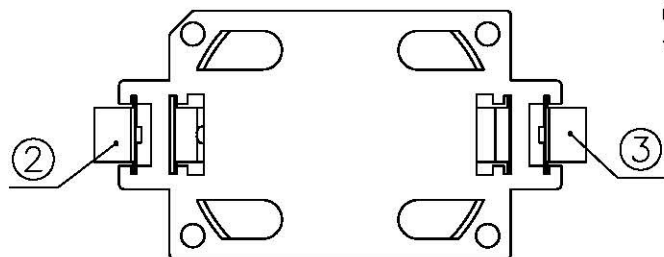

1.MATERIAL:

- a.HOUSING:LCP UL94V-0
- b.CONTACT:PHOSPHOR BRONZE
(SURFACE PLATING:Au1u")

SEE ORDERING INFORMATION

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
- d.OPERATING TEMPERATURE: -25°C~ +85°C

ORDERING INFORMATION

F-06-B***002

電池盒系列

F-06系列

SMT 180° TYPE

PLATING:

A-Au1U"
J-Ni100U"~120U"
K-Sn100U"~120U"

MATERIAL:

1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK
5A-PA6T WHITE
5B-PA6T BLACK

工程部

2017-07-11

ZW DANG

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.15mm	Gold Plating and Ni Under-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.15mm	Gold Plating and Ni Under-Plating
1	HOUSING	1	LCP	WHITE

UNLESS OTHERWISE SPECIFIED TOLERANCES		FLYING 汎翊國際有限公司			
DECIMALS:	ANGLES:	DSND	YangFeng	DATE	2017-07-11
X :±0.30	X :±1°	CHKD	ZhouRuicai	DATE	2017-07-11
X.X :±0.25	X.X :±0.5°	APVD	XueShunyang	DATE	2017-07-11
X.XX :±0.20					
X.XXX :±0.10					
WEIGHT: 1.49g		SCALE: 2:1	SIZE: A4	VIEW:	
SHEET 1 OF 1		UNIT: mm	REV.: A/0	OBJECT: MY	

TITLE:
F-2032-6 Au SMT
PART NO.:
F-06-B4AA002
DRAW NO.:MY-CP-0014