



7		8	
REV.	ECN NO.	REVISED	DATE

NOTE:

1. MATERIAL:

- a. HOUSING: THERMOPLASTIC GLASS FIBRE UL94V-0
b. CONTACT: BRASS
(SURFACE PLATING: Sn100u")
SEE ORDERING INFORMATION

2. ELECTRIC:

- a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
c. DIELECTRIC VOLTAGE: 750V AC ONE SEC LEVEL
d. OPERATING TEMPERATURE: -25° C ~ +85° C

ORDERING INFORMATION

F-07-A***001

電池盒系列

F-7系列

DIP 90° TYPE

PLATING:

A-Au1U"

J-Ni100U"~120U"

K-SN100U"~120U"

MATERIAL:

1A-PBT BLACK

1B-PA66 BLACK

2A-PPA BROWN



2B-PPA BLACK

3A-PPS BROWN


3B-PPS BLACK

4A-LCP WHITE

4B-LCP BLACK

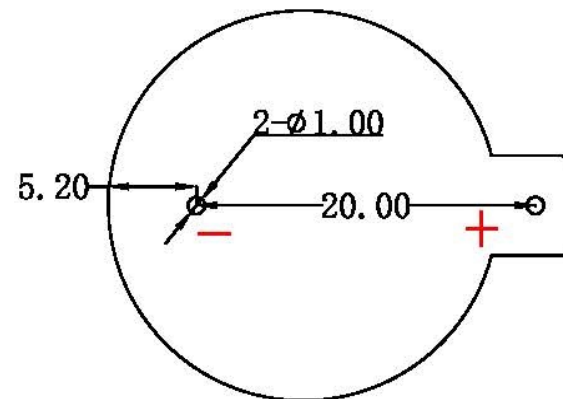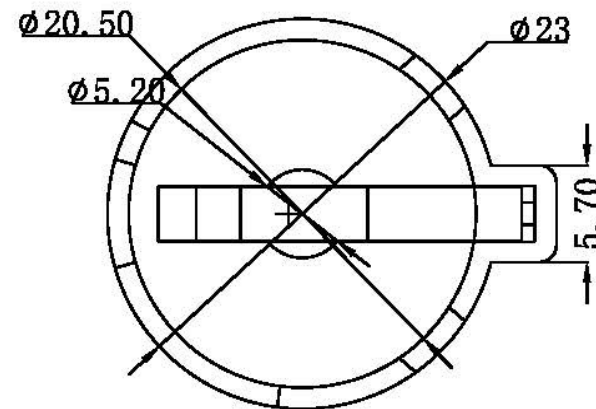

PCB Layout Diagram
Top View

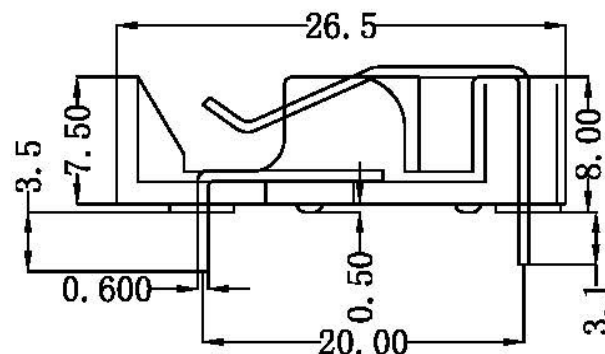

3	TERMINAL (-)	1	BRASS, T=0.60MM	Sn-Plating
2	TERMINAL (+)	1	BRASS, T=0.60MM	Sn-Plating
1	HOUSING	1	PBT	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		FLYING 汎翊國際有限公司 INTERNATIONAL			
DECIMALS:	ANGLES:	SCALE: 1:1	SIZE: A4	VIEW:	PART NO:
X : ±0.30	X : ±1°	UNIT: mm	REV.: A/O	OBJECT: MY	F-07-A1AK001
X.X : ±0.25	X.X : ±0.5°	DSND	YangFeng	DATE	2011. 2. 20
X.XX : ±0.20		CHKD	ZhouRuicai	DATE	2011. 2. 20
X.XXX : ±0.10		APVD	XueZhengy	DATE	2011. 2. 20
WEIGHT: 1.7 g		TITLE:			
SHEET 1 OF 1		F-2CR2032-7 DIP			