



REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

- a.HOUSING:PPA
b.CONTACT:PHOSPHOR BRONZE
(SURFACE PLATING: Au1u")

SEE ORDERING INFORMATION

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
d.OPERATING TEMPERATURE: -25° C~ +85° C

ORDERING INFORMATION

F-08-B***001

PLATING:
A-Au1U"
J-Ni100U"~120U"
K-Sn100U"~120U"

F-08系列






SMT 180° TYPE

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

工程部

2017-06-28

ZW DANG

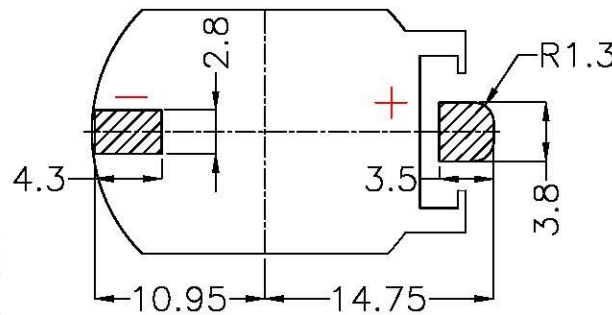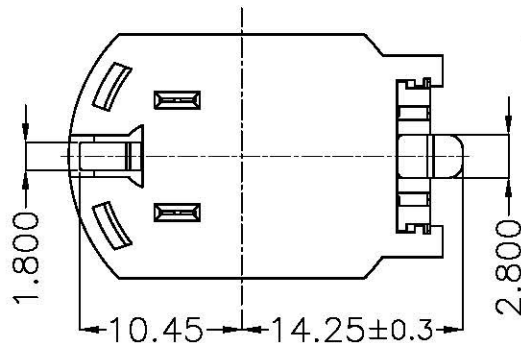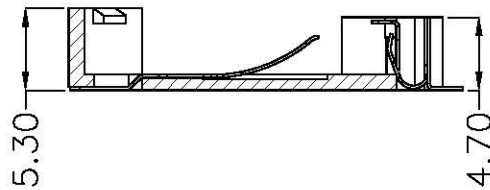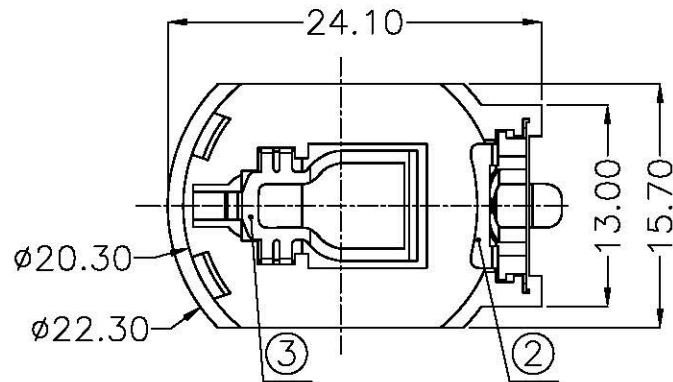

PCB Layout Diagram
Top View

3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
1	HOUSING	1	PPA	BROWN
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		FLYING 汎翊國際有限公司 INTERNATIONAL			
DECIMALS:	ANGLES:	DSND	YangFeng	DATE	2017-06-28
X :±0.30	X :±1°	CHKD	ZhouRuicai	DATE	2017-06-28
X.X :±0.25	X.X :±0.5°	APVD	XueShunyang	DATE	2017-06-28
X.XX :±0.20					
X.XXX :±0.10					
WEIGHT:	0.86g	SCALE:	2:1	SIZE:	A4
SHEET	1 OF 1	UNIT:	mm	REV.:	A/0
		OBJECT:	MY		

TITLE:	F-2032-8 SMT
PART NO.:	F-08-B2AA001
DRAW NO.:	MY-CP-0007