

7		8	
REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

a.HOUSING:PPA

b.CONTACT:PHOSPHOR BRONZE

(SURFACE PLATING: Au1u")

SEE ORDERING INFORMATION

2.ELECTRIC:

a.CONTACT RESISTANCE: 30 MILLIOHMS MAX

b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN

c.DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL

d.OPERATING TEMPERATURE: -25°C~ +85°C

ORDERING INFORMATION

F-2016-B***001

電池盒系列

F-2016系列

SMT 180° TYPE

- PLATING:

A-Au1U''

J-Ni100U''~120U''

K-Sn100U"~120U"

— MATERIAL:

1A-PBT BLACK

1B-PA66 BLACK

2A-PPA BROWN


2B-PPA BLACK

3A-PPS BROWN

3B-PPS BLACK

4A-LCP WHITE

4B-LCP BLACK

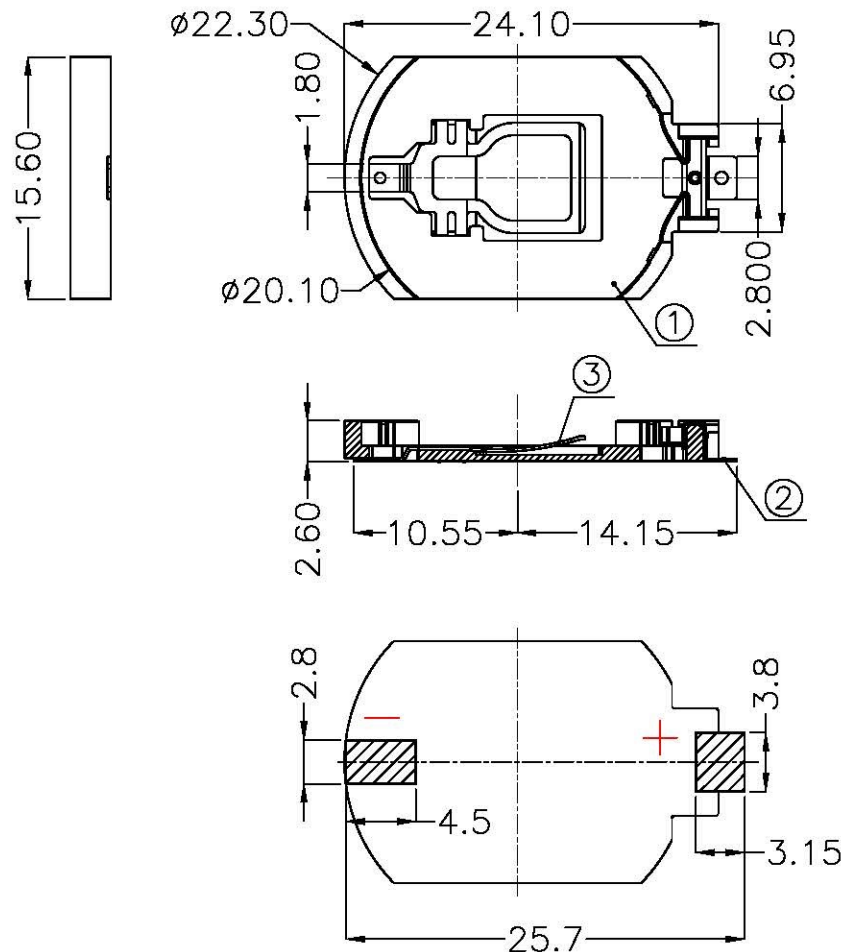

PCB Layout Diagram

Top View

3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.15mm	Gold Plating and Ni Under-Plating
1	HOUSING	1	PPA	BROWN
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		FLYiNG 汎翊國際有限公司 INTERNATIONAL				
DECIMALS: ANGLES: X ±0.30 X ±1° X.X ±0.25 X.X ±0.5° X.XX ±0.20 X.XXX ±0.10		DSND	YangFeng	DATE	2017-07-15	TITLE:
		CHKD	ZhouRuicai	DATE	2017-07-15	F-2016-8-1 PPA SMT
		APVD	XueShunyong	DATE	2017-07-15	PART NO.:
WEIGHT: 0.66g		SCALE: 2:1	SIZE: A4	VIEW: 	F-2016-B2AA001	
SHEET 1 OF 1		UNIT: mm	REV.: A/0	OBJECT: MY	DRAW NO.:MY-CP-0029	