



7		8	
REV.	ECN NO.	REVISED	DATE

NOTE:

1. MATERIAL:

- a. HOUSING: THERMOPLASTIC GLASS FIBRE UL94V-0
- b. CONTACT: Mn Steel
(SURFACE PLATING: Ni100u")
SEE ORDERING INFORMATION

2. ELECTRIC:

- a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c. DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
- d. OPERATING TEMPERATURE: -25° C ~ +85° C

ORDERING INFORMATION

F-03-A***005

電池盒系列

F-3系列

DIP 90° TYPE

PLATING:

A-Au1U"
J-Ni100u"~120u"
K-SN100u"~120u"







MATERIAL:

1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

工程部

2017. 2. 28

ZhouRuiCai

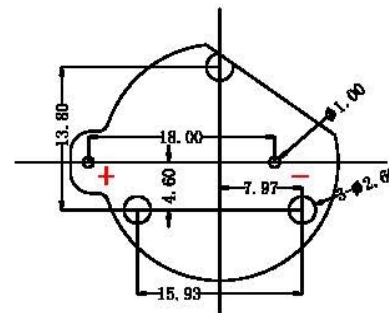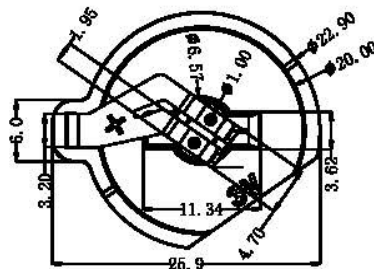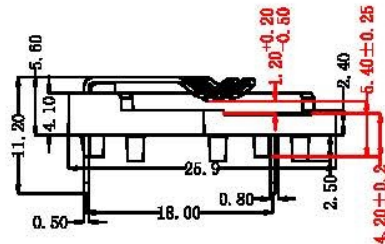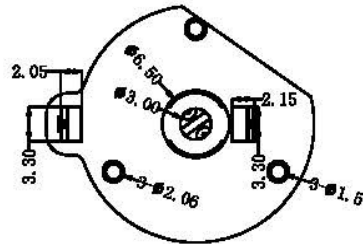

PCB Layout Diagram

Top View

NO.	PART NAME	Q' TY	MATERIAL	PLATING & COLOR
3	TERMINAL (-)	1	Mn Steel, T=0.5MM	Ni-Plating
2	TERMINAL (+)	1	Mn Steel, T=0.5MM	Ni-Plating
1	HOUSING	1	PBT	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES		FLYING 汎翊國際有限公司			
DECIMALS:		SCALE: 1:1		VIEW:	
ANGLES:		SIZE: A4		PART NO:	
X : ±0.30		UNIT: mm		REV.: A/O	
X.X : ±0.25		DATE		OBJECT: MY	
X.XX : ±0.20		DATE		DATE	
X.XXX : ±0.10		DATE		DATE	
WEIGHT: 1.94g		APVD		TITLE:	
SHEET 1 OF 1		XueZhengy		F-2032-3-2	