
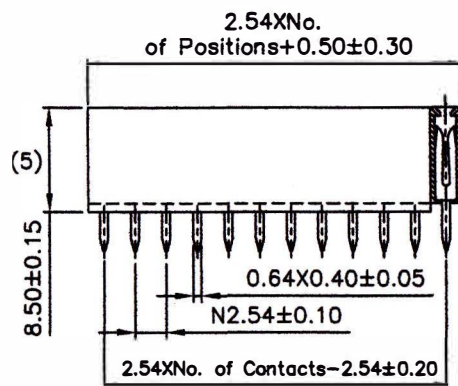


G
F
E
D
C
B
A

Dual Row

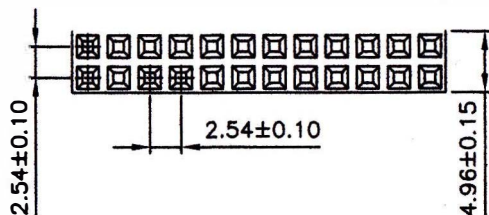

How To Order

FH- (1) × (2) (3) / (4) - (5)

(1) 1: Single row / 2: Double row / 3: Triple row

(2) NO. of Contact

(3) P: Plug-Straight / PR: Plug-Right angle / PD: Plug-SMD

S: Socket-Straight / SR: Socket-Right angle /

(4) Contact Plating

GF: Gold Flash / G3: Gold Plated 3u"

SG: Select Gold Flash / T: Tin Plated


(5) Plastic Length

EX: FH-1x40S/GF-8.5

Female Header, Single row, 40pin / Socket, Straight, Gold Flash,


Plastic Length 8.5 mm

P.C.B. Layout Dual Row

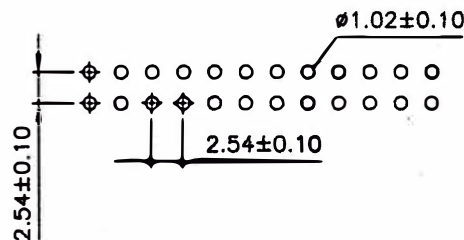

放大詳圖,比例:2X1

Dual Row

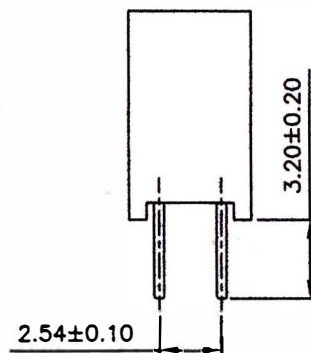

Technical Data

Material:

Insulator Material: PBT+30% Glass
Fiber UL94V0

Contact Material: Brass

Plated: Gold flash or Tin plated

Electrical:

Insulation resistance: 5000MΩ Min
at DC500V

Contact Resistance: 20mΩ Max
at DC100 mA

Current rating: 1A

Operating Temperature:
-55°C to +105°C
260°C/10sec Max

SER	REVISIONS	CHK	DATE	TOLERANCES	ARE	FLYING			
△	新圖發行	Pai	2007/03/30	X. X.X X.XX X.XXX	±0.100 ±0.050 ±0.025 ±0.005	DRAWING NO	A-001	NAME	排母, 併排180°
DRAWN	DATE	CHECKED	DATE	APPROVED	DATE				
Pai	2007/03/30								
						UNIT	MM	SCALE	1:1
						REV	A		