

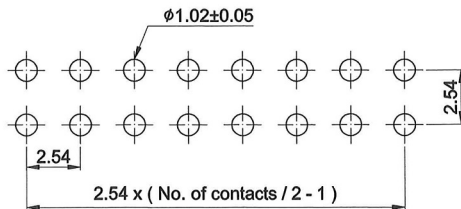
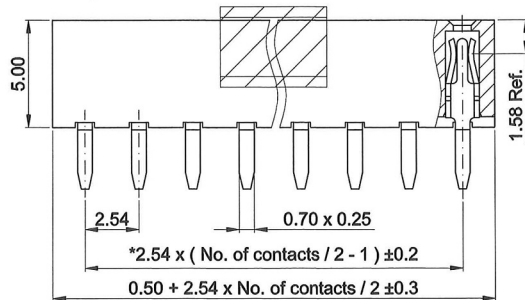


HSF
Compliant

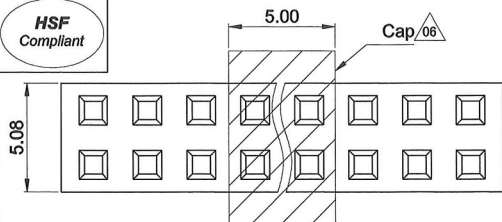

Recommended P.C.B. Layout



F1SC50DxxGFxA29000x

Packing

V : Tray (standard)

T : Tube /05

U : Cap + Tube /05

S : Cap + Tape & Reel /05

W : Cap +Tray /05

Material

B : PBT + Phosphor Bronze (standard) /04

Z : Nylon-6T(H.F.) + Phosphor Bronze

No. of contacts

REV.	DESCRIPTION	DATE	APPR.
04	新增Nylon-6T無鹵素塑膠材質	2011/08/27	游熾瑩
05	新增包裝規格	2013/10/02	羅文含
06	CAP材質改為LCP	2017/07/20	詹淑梅

Specifications

Current & Voltage Rating : 3A & 25Vac max.

Insulation Resistance : 5000 MΩ min.

Contact Resistance : 20 mΩ max.

Dielectric Withstanding : AC 500V

Operating Temperature : -25°C ~ +85°C (PBT)

-40°C ~ +105°C (NY6T)

Max. Processing Temp. : 245±5°C for 3~5 seconds (NY6T)

Contact Material : Phosphor Bronze

Insulator Material : PBT / Nylon-6T(H.F.), /04

UL 94V-0 (Black)

Cap Material : LCP, UL 94V-0 (Black) /06

Finish : Gold plated

FLYING
INTERNATIONAL



THIRD ANGLE
PROJECTION

DESIGN UNITS
mm □ INCH

SIZE:

A4

SCALE:

FREE

SHEET:

1/1

CPN :

DAN NO. : P10609-032

TITLE: 2.54mm Female Header
Dual Rows, Straight Type (H=5.0)

PARTS NO.:

F1SC50DxxGFxA29000x

DWG NO.:

JAWS-SOP-F1SC003

REV.

06

GENERAL TOLERANCES :

±0.30

DRAWN

蕭慧貞

DATE

2017/09/30

CHECKED

Allen

DATE

2017/09/30

APPROVED

王思勤

DATE

2017/09/30