



SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C



Contact Material:Phosphor Bronze

Contact Plating:Au Over Ni



Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

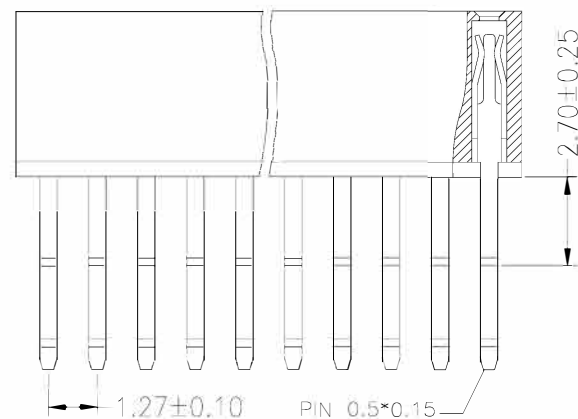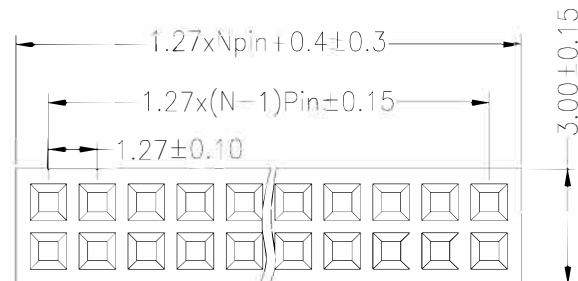

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

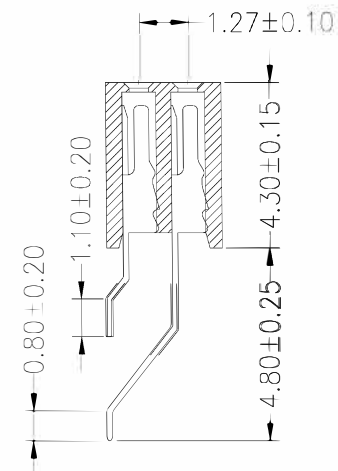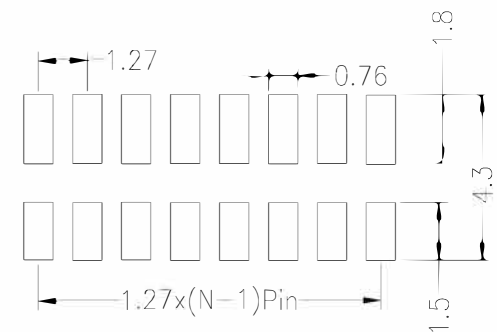

Ordering Information

2443 -02 XX X N XX Z U X 01

No.of
Pins
Per Row
1*50

Insulator Material
Option

A=BK-PBT
B=BK-PA66
C=BK-PA6T
D=BK-PA46
F=BK-LCP

Contact Plating

G1:1U" Gold
G2:1.5U" Gold
G3:2U" Gold
G4:3U" Gold
G5:5U" Gold
G6:10U" Gold
G7:15U" Gold
S0:Gold Flash/Tin
SN:Tin

Packing

O=PE Bag
A=Tray
T=Tube
P=Tube+Cap
R=Reel+Cap
M=Reel+Mylar

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

WZG

14.08.14

SCALE

FIT

UNIT

SIZE

SHEET

PROJ.

mm

A4

1/1

PROJ.

FLYING
INTERNATIONAL

PART NO.:

2443-02XXXXXXZUX01

TITLE:

1.27PF 2xNPin H4.3卧贴

A0

2012.04.18

NEW DRAWING

REV

DATE

MODIFICATION DESCRIPTION

CHANGE