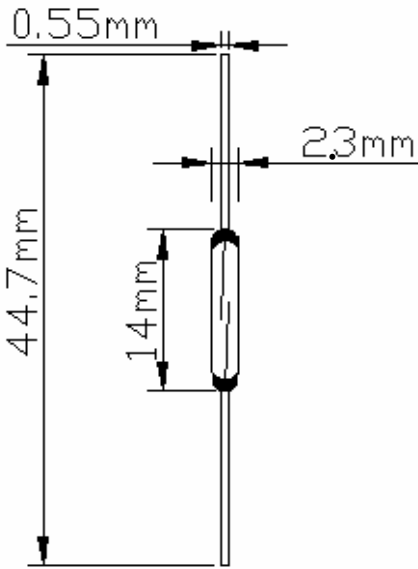


規 格 書
SPECIFICATIONS

Part #	MKA-14103
Dimensions Units: mm 	
Contact form	1A
Contact Position	SYM
Contact Material	Ru
Max. Contact Rating	10 W
Max. Switching Voltage	100 VDC
Max. Switching Current	0.5 A
Max. Initial Contact Resistance	100 mΩ
Pull In Value (AT)	10-15
Min. Drop out (AT)	5
Min. Breakdown Voltage	200 VDC
Max. Contact Capacitance	0.3 pf
Min. Insulation Resistance	$10^9 \Omega$
Typ. Resonant Frequency	3 KHz
Electrical Life (Resistive loads)	2×10^6 (5VDC, 10mA) 10^6 (24vdc, 250mA)
Test Coil: Number of turns	5,000
Resistance	870Ω
UL file #	