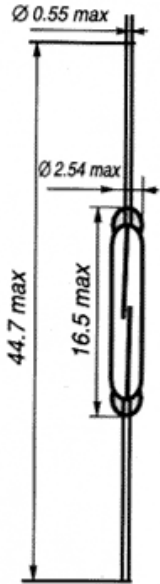


規 格 書
SPECIFICATIONS

Part #	MKA-16101
Dimensions Units: mm 	
Contact form	1A
Contact Position	SYM
Contact Material	Ru
Max. Contact Rating	10 W
Max. Switching Voltage	100 VDC
Max. Switching Current	1 A
Max. Initial Contact Resistance	100 mΩ
Pull In Value (AT)	10-35
Min. Drop out (AT)	5
Min. Breakdown Voltage	200 VDC
Max. Contact Capacitance	0.3 pf
Min. Insulation Resistance	10 ⁹ Ω
Typ. Resonant Frequency	3 KHz
Electrical Life (Resistive loads)	2 x 10 ⁶ (5VDC,10mA) 10 ⁶ (24vdc,250mA)
Test Coil: Number of turns	5,000
Resistance	620Ω
UL file #	