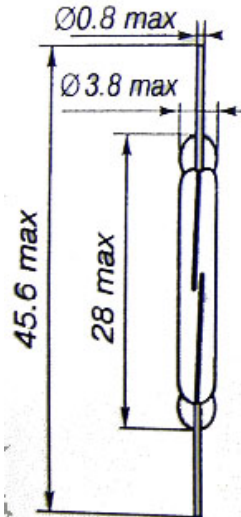


規 格 書
SPECIFICATIONS

Part #	MKA-27101
Dimensions Units: mm 	
Contact form	1A
Contact Position	SYM
Contact Material	Ru/Rh
Max. Contact Rating	12 W
Max. Switching Voltage	250 VDC
Max. Switching Current	0.5 A
Max. Initial Contact Resistance	100 mΩ
Pull In Value (AT)	30-60
Min. Drop out (AT)	10
Min. Breakdown Voltage	500 VDC
Max. Contact Capacitance	0.5 pf
Min. Insulation Resistance	10 ⁹ Ω
Typ. Resonant Frequency	1.7 KHz
Electrical Life (Resistive loads)	5x10 ⁶ (50mVDC,10 ⁻³ mA) 5x10 ⁵ (50vdc,100mA)
Test Coil: Number of turns	5,000
Resistance	400Ω
UL file #	