

PCB Layout (Top View)

所有材料為
"環保材料"

2006.7.04

RoHS

MATERIAL AND FINISH



Housing: Nylon-6T (UL94V-0), Black.
Terminal: Brass, Gold Plating.

ELECTRICAL CHARACTERISTICS

Current Rating: 1.0 Amp. Max..
Dielectric Withstand Voltage:
800V AC RMS for 60Seconds.
Insulation Resistance:
1000M Ohms Min. at 500V DC.

MECHANICAL CHARACTERISTICS

Operating Temperature: -55°C ~ +105°C.

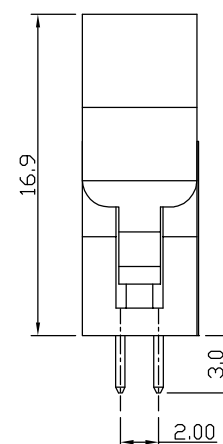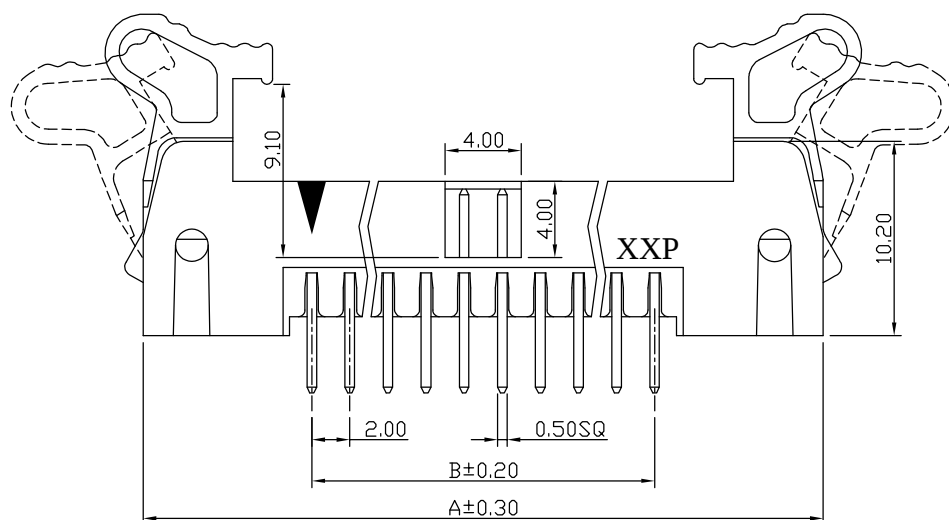

PART NO.	Dimensions	
	A	B
CHE200S010	25.70	8.00
CHE200S012	27.70	10.00
CHE200S014	29.70	12.00
CHE200S016	31.70	14.00
CHE200S020	35.70	18.00
CHE200S022	37.70	20.00
CHE200S024	39.70	22.00
CHE200S026	41.70	24.00
CHE200S030	45.70	28.00
CHE200S034	49.70	32.00
CHE200S040	55.70	38.00
CHE200S044	59.70	42.00
CHE200S050	65.70	48.00

FLYING
INTERNATIONAL

DESCRIPTION(內容):

2.00mm Box Header Ejector Type
PCB Mount Vertical with Short Latch

PART NO: CHE200S0XX
(料號)
DWG NO(圖號): HD22170526

DRAWN(製圖):

KAY

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE: (公差)

.X ±0.3
.XX ±0.2
.XXX ±0.1

SCALE(比例):

FREE

REV:

R3

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE
變更環保章字樣
變更塑料: NY9T→PPS
變更塑料: NY9T→PPS & Dim A尺寸
NEW RELEASE
60.64.68Pin 停產
變更塑料: NY9T→NY6T, 圖面更新, 變更圖號

DATE

2006.07.04
2006.08.11
2006.09.27
2007.05.15
2009.07.17
2011.03.28
2013.05.14