


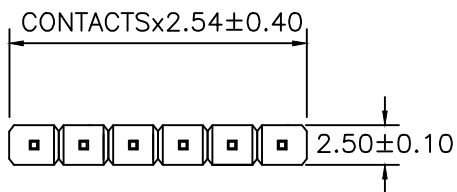


P254S1454O104G

排針-2.54mm-180度-14.54mm-1*4PIN PBT (塑高
=2.54mm 上針=10mm 下針=2mm)



RECOMMENDED P.C.B LAYOUT

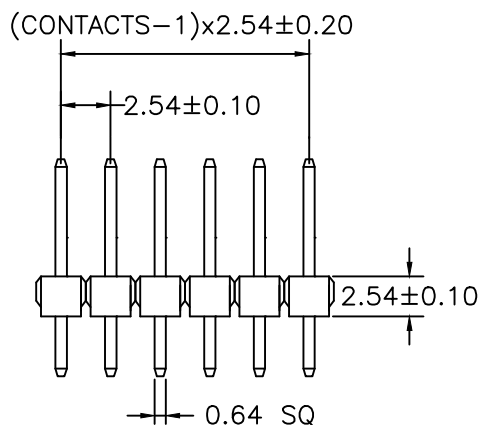

A: 14.54 mm B: 10.00 mm C: 2.00 mm

MATERIAL

HOUSING : PBT,UL94V-0

CONTACT : COPPER ALLOYS

PLATED : GOLD-FLASH

COLOR : BLACK

SPECIFICATION

CURRENT: 3A

OPERATING TEMPERATURE: -55°C TO $+105^{\circ}\text{C}$

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE: AC 1000V RMS

CONTACTS	
1X21	1X21
1X22	1X22
1X23	1X23
1X24	1X24
1X25	1X25
1X26	1X26
1X27	1X27
1X28	1X28
1X29	1X29
1X30	1X30
1X31	1X31
1X32	1X32
1X33	1X33
1X34	1X34
1X35	1X35
1X36	1X36
1X37	1X37
1X38	1X38
1X39	1X39
1X40	1X40

比例 (SCALE)	FREE	绘图 (DRAW)	Tina	FLYiNG INTERNATIONAL	
单位 (UNIT)	MM	审核 (CHECK)			
一般公差 (TOLERANCE)	承认 (AP*E)	/ /	图名 (NAME) PIN HEDAER 2.54 180° H:2.54	料号 (PART NO)	
.0= ± 0.38 .00= ± 0.25 ANG= $\pm 5^{\circ}$	投影法 PROJECTION	第三角		图号 (DRAW NO)	