
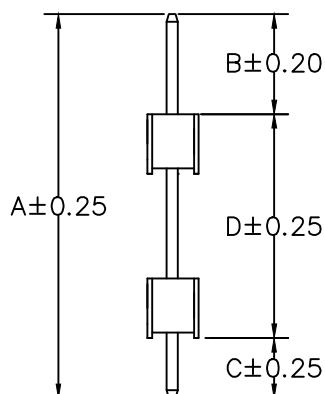


RECOMMENDED P.C.B LAYOUT

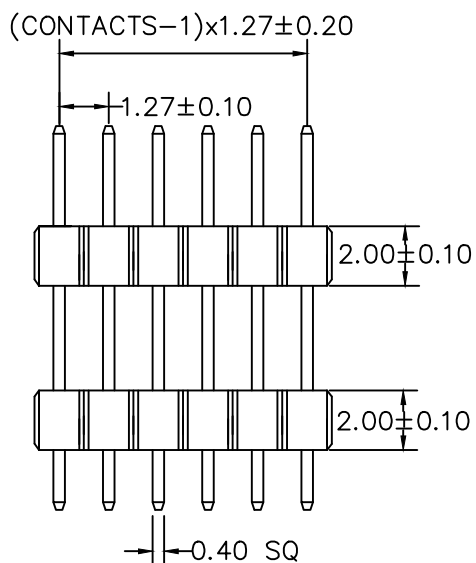

CONTACTS	
1X26	
1X27	
1X28	
1X29	
1X30	
1X31	
1X32	
1X33	
1X34	
1X35	
1X36	
1X37	
1X38	
1X39	
1X40	
1X41	
1X42	
1X43	
1X44	
1X45	
1X46	
1X47	
1X48	
1X49	
1X50	

NY6T

A: 8.00 mm B: 1.50 mm C: 1.50 mm D: 5.00 mm

MATERIAL

HOUSING : NYLON 6T,UL94V-0

CONTACT : COPPER ALLOYS

PLATED : GOLD-FLASH

COLOR : BLACK

SPECIFICATION

CURRENT: 1A

OPERATING TEMPERATURE: -55°C TO +105°C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 5000 MEGAOHMS MIN

DIELECTRIC STRENGTH : 1000 VAC MIN

比例 (SCALE)	FREE	繪圖 (DRAW)	Tina	FLYiNG INTERNATIONAL	
單位 (UNIT)	MM	審核 (CHECK)	/ /		
一般公差 (TOLERANCE)	承認 (AP" E)	/ /	圖名 (NAME) : PIN HEADER 1.27	料號 (PART NO)	P127S80T104NY6TG
.0 $\pm$ 0.38 .00 $\pm$ 0.25 ANG $\pm$ 5°	投影法 PROJECTION	第三角	圖號 (DRAW NO)		