
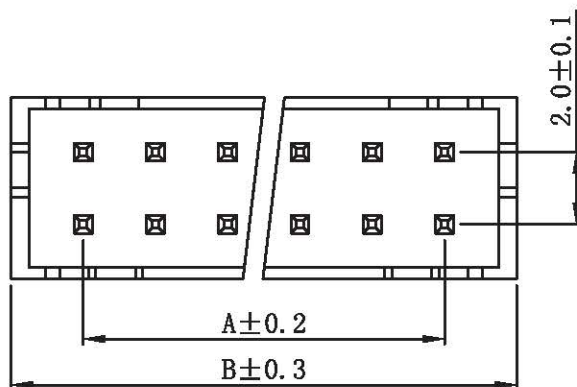
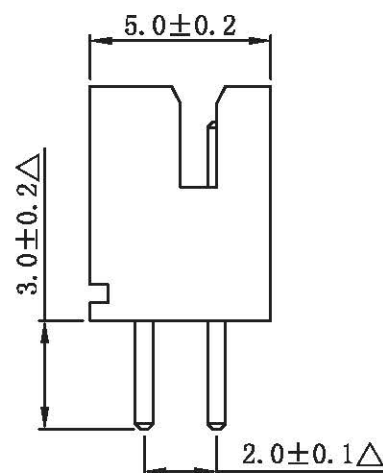


P.C.B Hole Layout

SPECIFICATIONS

Current rating	:2A AC, DC
Voltage rating	:250V AC, DC
Temperature range	: -25° C ~ +85° C
Contact resistance	:10mΩMax
Insulation resistance	:1000MΩMin
Withstanding voltage	:800 V AC/minute
Pin Material	:Brass
Finished	:Tin-plated
Housing Material	:Nylon-66+30%GF, UL94 V-0
Color	:本色

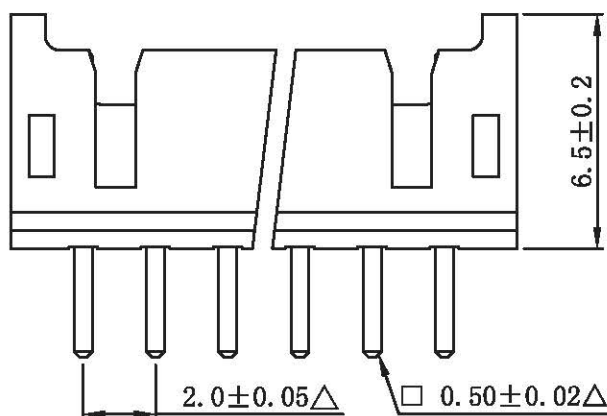

Circuits	Dimension mm	
	A	B
2*02	2.00	6.00
2*03	4.00	8.00
2*04	6.00	10.00
2*05	8.00	12.00
2*06	10.00	14.00
2*07	12.00	16.00
2*08	14.00	18.00
2*09	16.00	20.00
2*10	18.00	22.00
2*11	20.00	24.00
2*12	22.00	26.00
2*13	24.00	28.00
2*14	26.00	30.00
2*15	28.00	32.00
2*16	30.00	34.00
2*17	32.00	36.00
2*18	34.00	38.00
2*19	36.00	40.00
2*20	38.00	42.00

FLYiNG
INTERNATIONAL

DESCRIPTION(內容):
2.0mm Wafer 180°
塑膠為本色(環保材料)

PART NO:
(料號) **CCP-HD20-2*XX**

DWG NO(圖號):

DRAWN(製圖):
李建安

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

.0 ±0.20
.00 ±0.15
.000 ±0.10

SCALE(比例):
1:XX



REV:
A/5

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

料號由CP-HD20-2*XX改為CCP-HD20-2*XX

增加Pin數

DATE

2007.07.18

2007.10.30

2011.08.15