

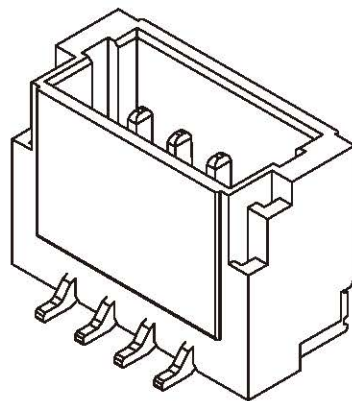
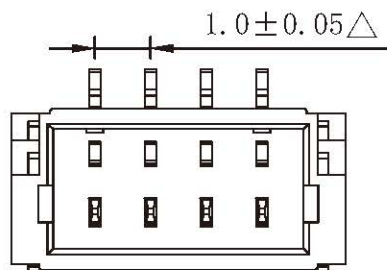
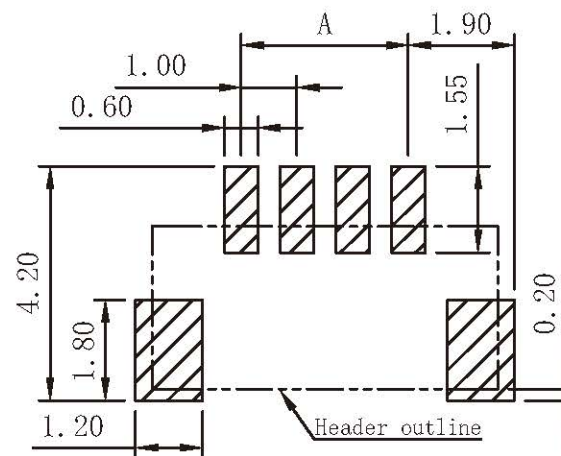


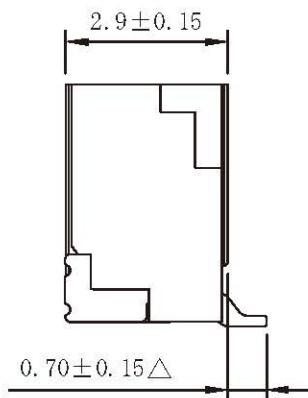

SPECIFICATIONS

Current rating	:1A AC, DC
Voltage rating	:50V AC, DC
Temperature range	: -25°C ~ +85°C
Contact resistance	:20m ΩMax
Insulation resistance	:100M ΩMin
Withstanding voltage	:500 VAC/minute
Pin Material	:Phosphor Bronze
Finished	:Tin-plated
Housing Material	:Nylon-6T, UL94 V-0
Color	:Natural

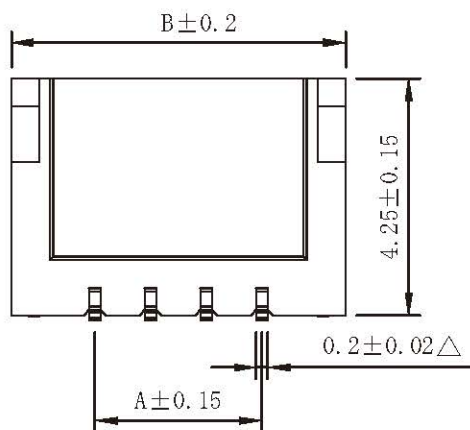

P. C. B Layout

Circuits	Dimension mm	
	A	B
2PIN	1.00	4.00
3PIN	2.00	5.00
4PIN	3.00	6.00
5PIN	4.00	7.00
6PIN	5.00	8.00
7PIN	6.00	9.00
8PIN	7.00	10.00
9PIN	8.00	11.00
10PIN	9.00	12.00
11PIN	10.00	13.00
12PIN	11.00	14.00
13PIN	12.00	15.00
14PIN	13.00	16.00
15PIN	14.00	17.00
16PIN	15.00	18.00
17PIN	16.00	19.00
18PIN	17.00	20.00
19PIN	18.00	21.00
20PIN	19.00	22.00

FLYING
INTERNATIONAL

DESCRIPTION(內容):
1.0mm Pin Wafer 180° SMT
(環保材料)

PART NO:
(料號) **CCSH-W10-XX**

DWG NO(圖號):

DRAWN(製圖):
袁仕潤

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

.0 +0.20
.00 +0.15
.000 +0.10

SCALE(比例):

1:XX

REV:
A7

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

料號由 CSW W10 XX 改為 CCSH W10 XX

五金材質:磷青銅改為黃銅

五金材質:黃銅改為磷青銅

修改Layout圖

DATE

2007.07.18

2007.10.10

2008.04.11

2008.08.22

2008.11.28

2009.06.15

FILE NO: CWJ4E-09