
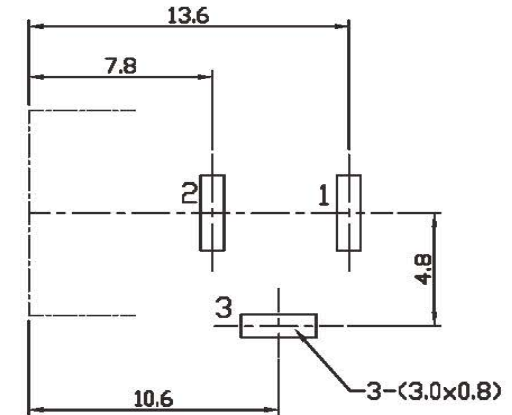
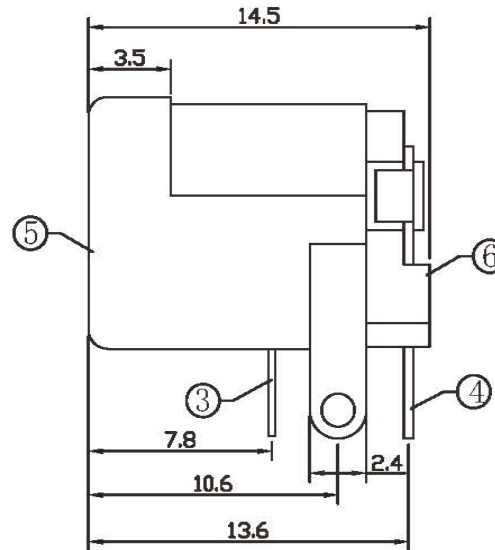


* RoHS COMPLIANT *

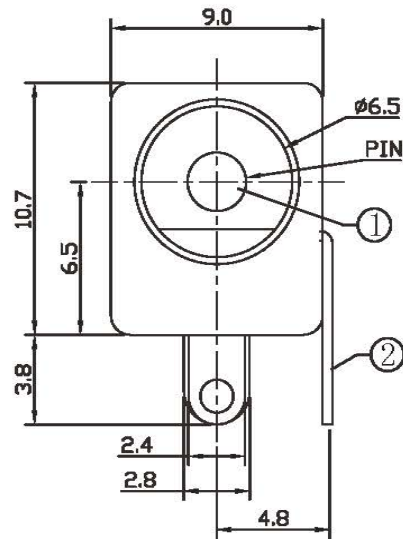

Specifications:

1. Contact Resistance: 30mΩ MAX.At AC 100mA Max. 1KHz
2. Insulation Resistance: 100MΩ MIN. At 500V DC.
3. Rated Voltage And Current: DC12V.2A MAX;AC 100V. 1A Max.
4. Dielectric Withstanding Voltage: 500V AC FOR ONE MINUTE
5. Insertion Force : 3.0Kg Maximum.
6. Extraction Force : 0.3Kg Maximum.

CAT. NO.	PIN	SCHEMATIC
CDD-04PB-020	Ø2.0	

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

* REVISIONS

LTR	BDESCRIPTION	DATE	REVISED	APPROVED
-----	--------------	------	---------	----------

T:1.6 Dimensions of PC board holes

Tolerance : ±0.05(Printed-top view)

6	COVER	1	PBT 4815	UL-94V0
5	HOUSING	1	PBT 4815	UL-94V0
4	FLAT PIECE	1	C2680 t=0.4	Sn PLATED
3	SPRING	1	C5191 t=0.3	Sn PLATED
2	CURVE PIECE	1	C2680 t=0.4	Sn PLATED
1	PIN	1	H59(COPPER ALLOY)	Ni PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK
DWN	LILY	DATE	2014.04.11	3RD ANGLE PROJECTION
CHKD	ANDY	DATE	2014.04.11	NAME
APVD	JON	DATE	2014.04.11	CAT. NO.
UNIT: mm				CDD-04PB-020
DWN.NO.				A-020-04
001				

FLYING
INTERNATIONAL