
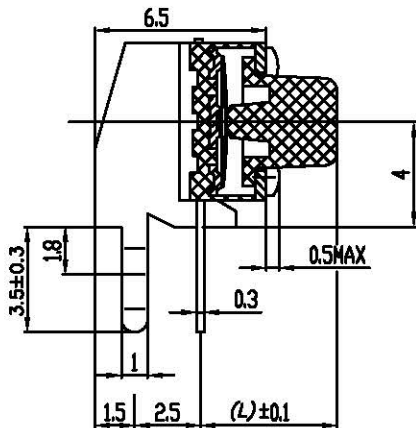
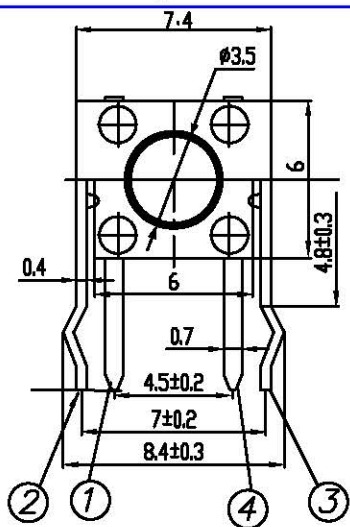


CIRCUIT

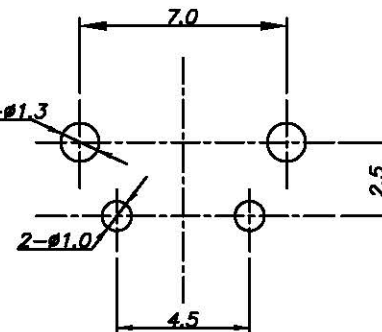


P.C.B LAYOUT

FLY-1102V(L)-(OF)-(B)-K

TYPE	1	2	3
Operating Force	100±30gf	160±30gf	250±50gf
Return Force	20gf	40gf	60gf

STEM COLOR	
B	Black
R	Red

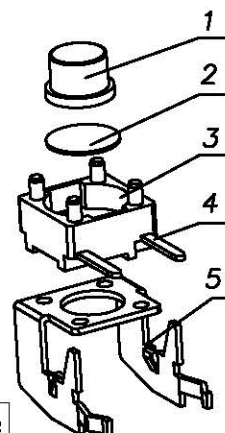

1. Rating: DC12V 50mA
2. Contact Resistance : 50MΩ max(initial)
3. Insulation Resistance: 100MΩ min
4. Electrically Life : 100gf 100,000 cycles
160gf 80,000 cycles
250gf 60,000 cycles
5. Travel: 0.25±0.1mm


未標注公差尺寸	
METRIC	TOLERANCE
.0	±0.15
.00	±0.10
.000	±0.05

Model. NO.	1102V	1102VAC	1102VAD	1102VA	1102VAL	1102VAA	1102VAB	1102VB	1102VE	1102VN	1102VNL	1102VD	1102VY	1102VR	1102VC
L(mm)	3.15	3.35	3.65	3.85	4.35	4.85	5.35	5.85	6.15	6.35	6.55	6.85	7.35	7.85	8.35

1102VX	1102VU	1102VI	1102VJ	1102VK	1102VF	1102VG	1102VO	1102VW	1102VL	1102VM	1102VQ	1102VH	1102VHX	1102VZ	1102VZI
8.85	9.35	9.85	10.35	10.85	11.35	11.85	12.35	12.85	13.35	13.85	14.15	15.85	16.85	18.85	19.85

1102VZZ
24.85

NO.	NAME	MATERIAL	NATIONALITY	QTY'	FINISHING
1	stem	PA66	CHINA	1	L≤8.35mm
		PC	JAPAN	1	L>8.35mm
2	contact	Phosphor bronze	KOREA	1	Contact side sliver plating
3	case	PA66	CHINA	1	Black
4	terminal	Brass	CHINA	1	Sliver plating
5	bracket	Spcc-sd	CHINA	1	Cusn plating



單位
mm

比例
FREE

日期
2016-03-03

核准

審核

設計繪圖

料號

FLY-1102V(L)-(OF)-(B)-K

頁數

1/1

FLYING

WILLIAM

AMY

EWS

品名

TACT SWITCH

圖號

FLY-1102V(L)-(OF)-(B)-K

版本

B