

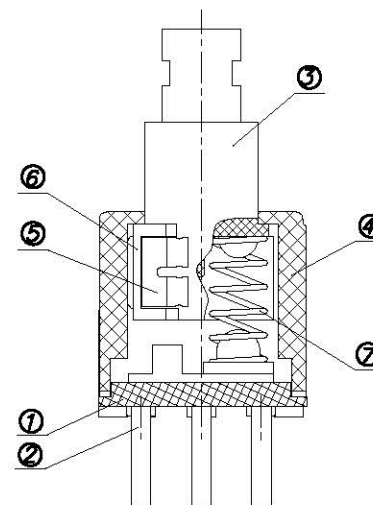
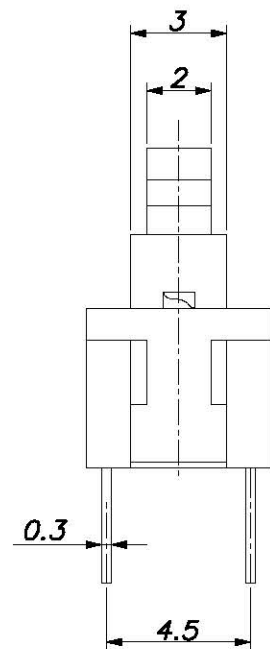
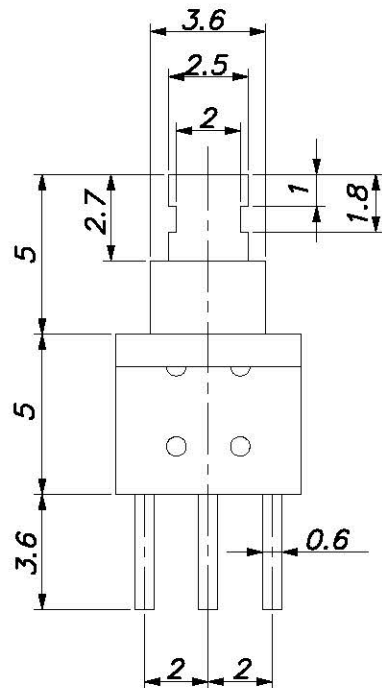



FLY-2216(L/N)-K

SMD Push Switch
5.8x5.8 Series
 Operation mode:
L:SELF-Lock
N:NON-Lock



Dimensions unless otherwise specified	
Size Range	Tolerance
L≤1	±0.15
1<L≤8	±0.20
8<L≤23	±0.25
23<L≤50	±0.30
ANGEL	±1°



P.C.B Layout

Specifications:

1. Rating: DC 30V 0.1A
2. Operating force: 200±80gf
3. Corcuit: 2C-2P
4. Stroke: Full 2.0mm
Lock 1.0mm
5. General tolerance: ±0.2mm
6. Life: 10,000 Cycles

NO.	PART NAME	QTY	MATERIAL	REMARK
8	Plating		Silver plating	
7	Spring	1	carbon steel wire	
6	Crochet	1	Stainless Steel	
5	Reed	2	Ag/Copper	
4	Cover	1	PC	Grey
3	Stern	1	POM	White
2	Terminal	2	Silver-plated copper	Silver plating
1	Case	1	PA66	Black

D		單位	比例	日 期	核 准	審 核	設計繪圖	料 號	FLY-2216(L/N)-K		頁 數	1/1
		mm	FREE	2016-08-05	WILLIAM	AMY	EWS	品 名	PUSH SWITCH			
		FLYiNG						圖 號	FLY-2216(L/N)-K		版 本	B
1		2			3			5				