
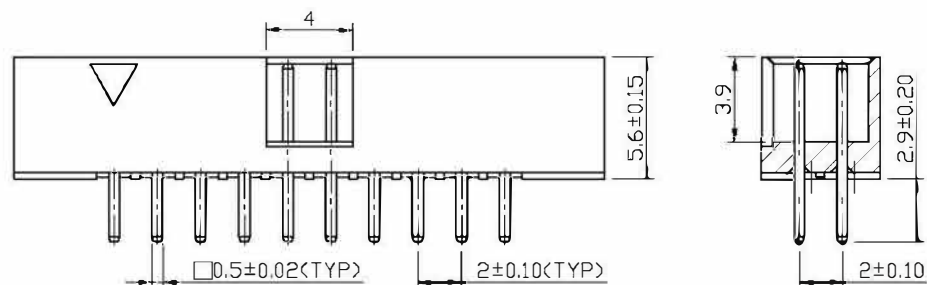


Recommended P.C.B. layout

所有材料為
"環保材料"

2009.7.16

RoHS

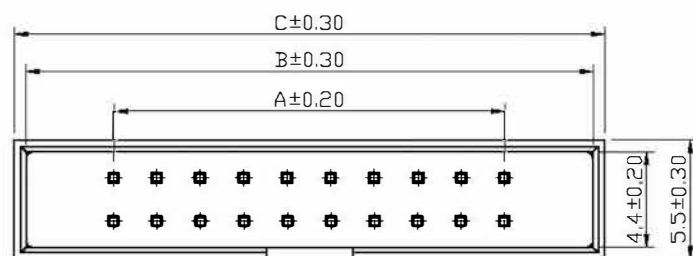

1. SPECIFICATIONS

Current rating: 1Amp.

Insulator resistance: 5000 Megohms min.

Dielectric withstanding: AC 500V.

Operating temperature: -40 °C ~ +105°C.

Max. processing: 260 °C for 10 seconds.

2. MATERIAL

Contact: Copper alloy.

Insulator: Nylon 9T, UL 94V-0.

Color: Black.

Finish: Gold flash all over.

No. of contacts	Part No.	Dimensions			Remark
		A	B	C	
6P	BH200S06	4.0	12.1	13.2	
8P	BH200S08	6.0	14.1	15.2	
10P	BH200S10	8.0	16.1	17.2	
12P	BH200S12	10.0	18.1	19.2	
14P	BH200S14	12.0	20.1	21.2	
16P	BH200S16	14.0	22.1	23.2	
18P	BH200S18	16.0	24.1	25.2	
20P	BH200S20	18.0	26.1	27.2	
22P	BH200S22	20.0	28.1	29.2	
24P	BH200S24	22.0	30.1	31.2	
26P	BH200S26	24.0	32.1	33.2	
28P	BH200S28	26.0	34.1	35.2	
30P	BH200S30	28.0	36.1	37.2	
32P	BH200S32	30.0	38.1	39.2	
34P	BH200S34	32.0	40.1	41.2	
36P	BH200S36	34.0	42.1	43.2	
40P	BH200S40	38.0	46.1	47.2	
44P	BH200S44	42.0	50.1	51.2	
50P	BH200S50	48.0	56.1	57.2	
60P	BH200S60	58.0	66.1	67.2	
64P	BH200S64	62.0	70.1	71.2	
68P	BH200S68	66.0	74.1	75.2	

FLYING
INTERNATIONAL

DESCRIPTION(內容):

Pitch 2.0 box header
(straight angle type-2.9)

PART NO BH200SXX
(料號)

DWG NO(圖號):

DRAWN(製圖):

KAY

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

X₁ ±0.15

X₂ ±3°

X₃ ±0.10

X₄ ±0.05

X₅ ±0.03

X₆ ±1°

SCALE(比例):

FREE



REV:

R1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

第38. 46. 48. 54. 56. 62Pin 停產

DATE

2009.07.16

2013.04.15