

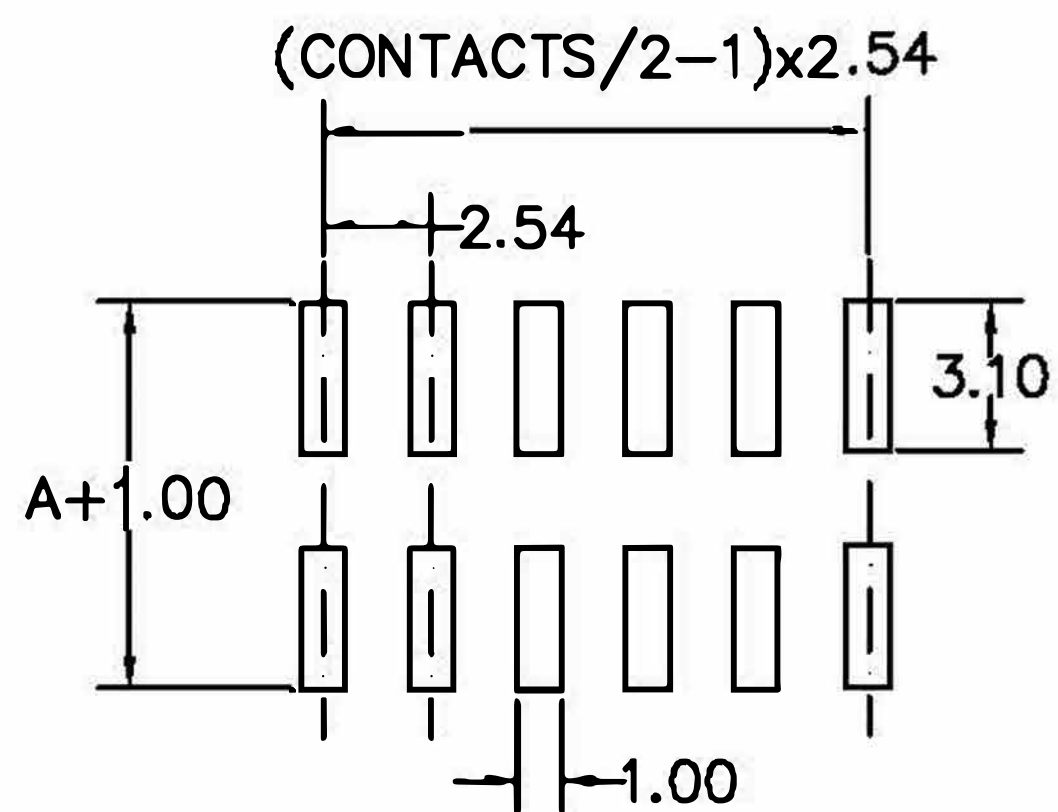
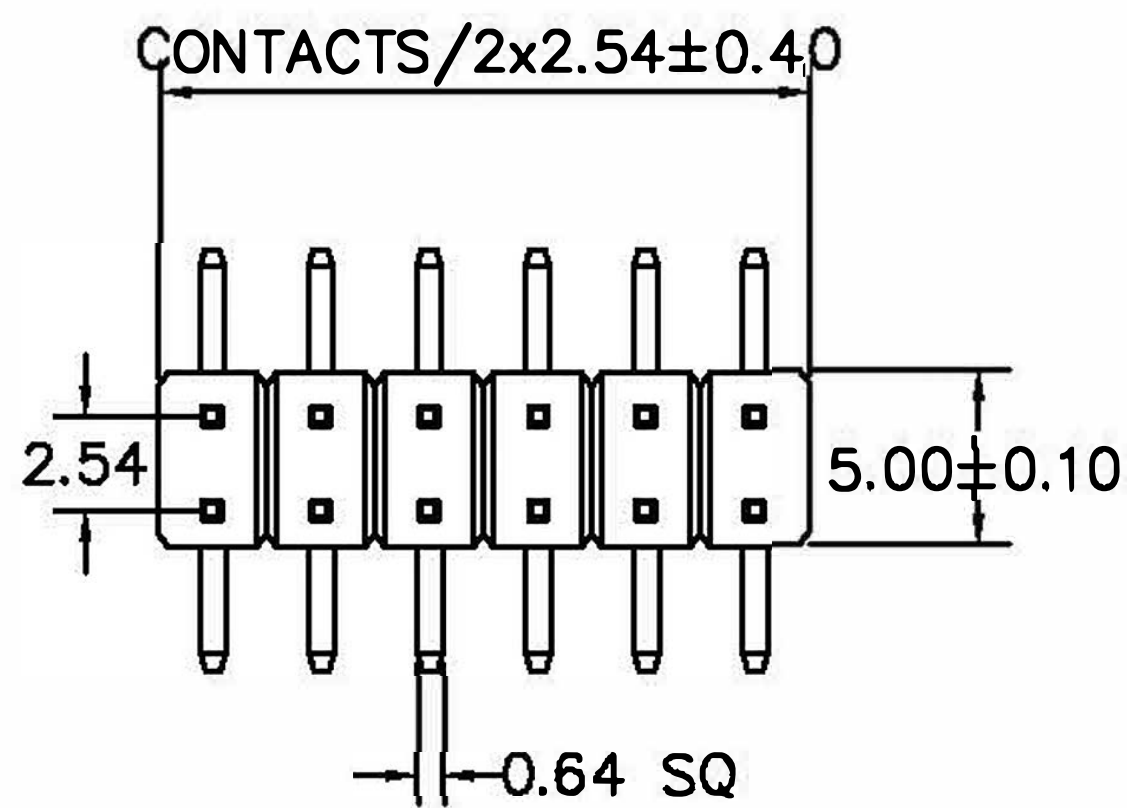


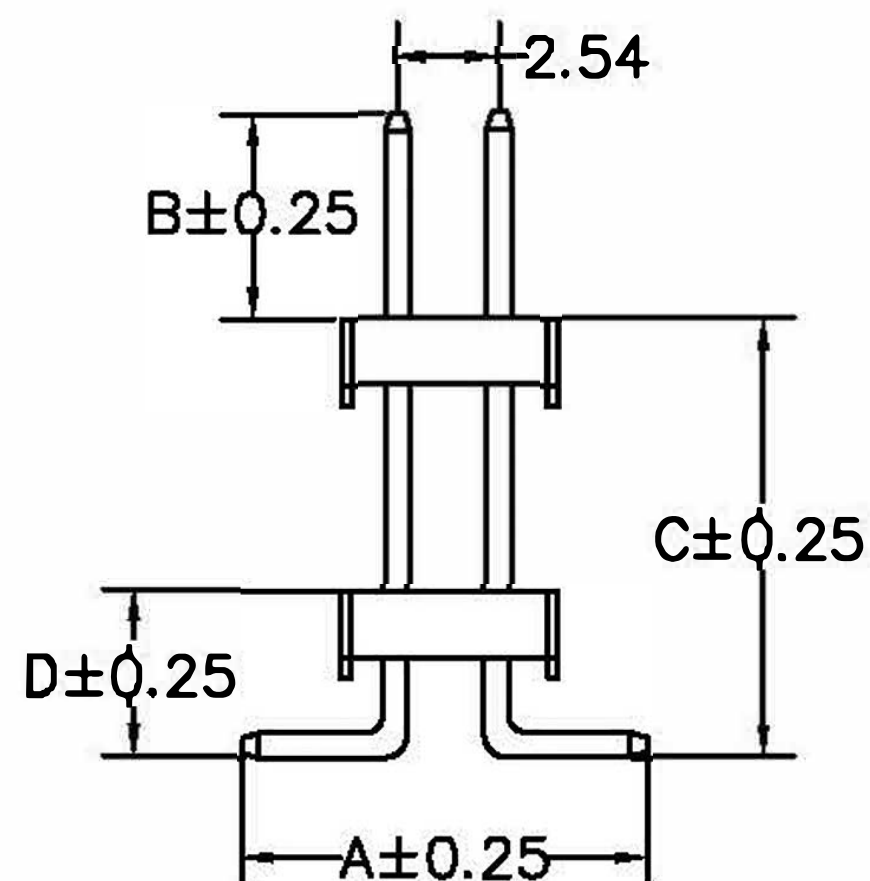

RECOMMENDED P.C.B LAYOUT

P254SMD233T210GNY6T

排針-2.54mm-SMT-2*10PIN NY6T-雙塑
(塑高=2.54mm A=7.5mm B=5.5mm C=7mm D=3.3mm)

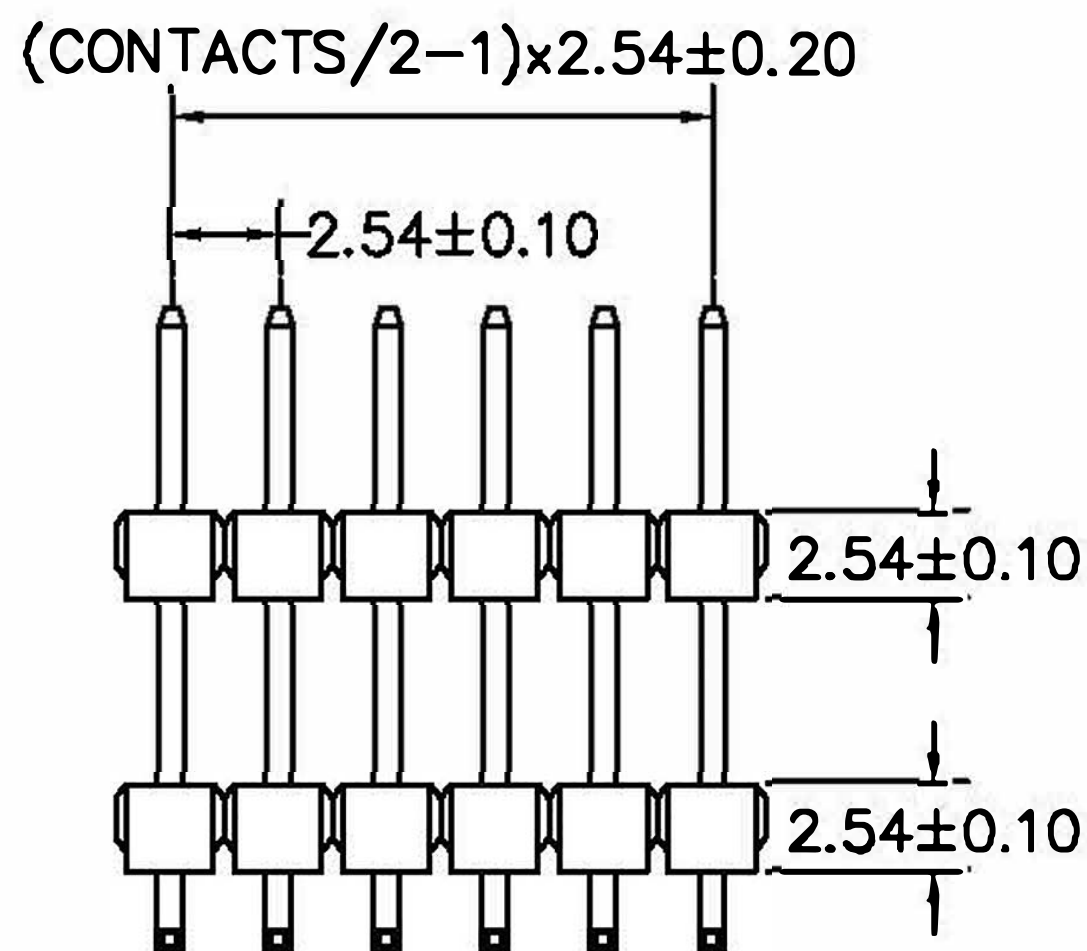

A: 7.50 mm B: 5.50 mm C: 7.00 mm D: 3.30 mm

MATERIAL

HOUSING : NYLON-6T,UL94V-0

CONTACT : COPPER ALLOYS

PLATED : GOLD-FLASH

COLOR : BLACK

SPECIFICATION

CURRENT: 3A

OPERATING TEMPERATURE: -55°C TO +105°C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE : AC 1000V RMS

CONTACTS	2X21
2X2	2X22
2X3	2X23
2X4	2X24
2X5	2X25
2X6	2X26
2X7	2X27
2X8	2X28
2X9	2X29
2X10	2X30
2X11	2X31
2X12	2X32
2X13	2X33
2X14	2X34
2X15	2X35
2X16	2X36
2X17	2X37
2X18	2X38
2X19	2X39
2X20	2X40

比例 (SCALE)	FREE	繪圖 (DRAW)	Tina	FLYiNG INTERNATIONAL	
單位 (UNIT)	MM	審核 (CHECK)	/ /		
一般公差 (TOLERANCE)		承認 (AP'VE)	/ /	圖名 (NAME) : PIN HEADER 2.54 SMT	
.0=±0.38 .00=±0.25 ANG=±5°		投影法 PROJECTION	第三角	料號 (PART NO)	P254SMD233TxxxGNY6T
				圖號 (DRAW NO)	2XSMT