



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃


Contact Material:Brass

Contact Plating:Au or Sn Over Ni



Insulator Material:Polyester(UL94V-0)

Standard: PA6T


Max.Processing Temp: 230℃ for 30-60 seconds
(260℃ for 10 seconds)

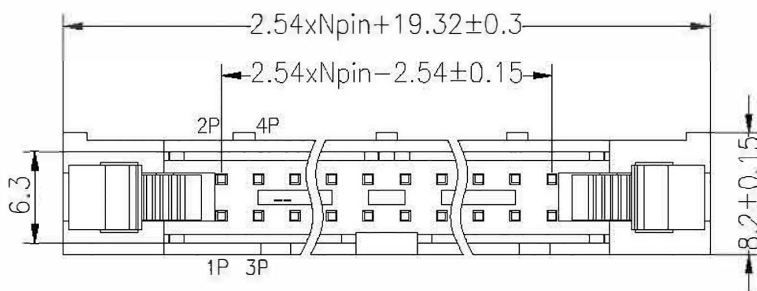

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)


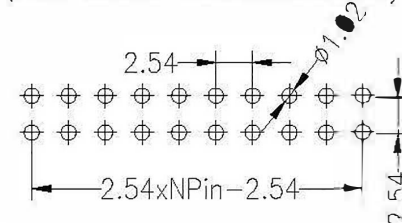


Long Latch



Short Latch

below 20Pos without the central hole

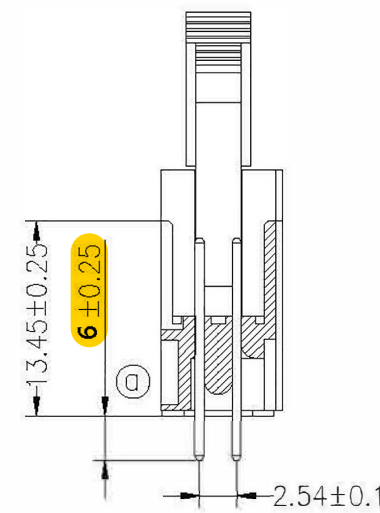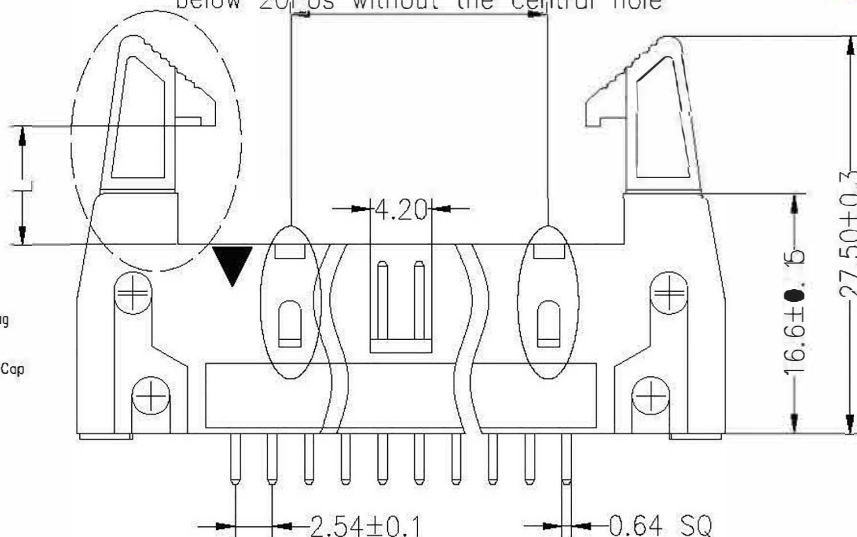

Ordering Information

3310 XX S XX X X X X 01

No. of Pins Per Row	Contact Plating	Insulator Material Option	Color Type	Latch Type	Packing
6-64	G0:Gold Flash	A=BK-PBT	B=Black	L=Long Latch	O=PE Bag
	G1:3U" Gold	B=BK-PA66	G=Grey	S=Short Latch	A=Tray
	G2:5U" Gold	C=BK-PA6T		N=Without Latch	T=Tube
	G3:10U" Gold	D=BK-PA46			P=Tube+Cap
	G4:15U" Gold	F=BK-PA9T			
	G5:30U" Gold	F=BK-LCP			
	S0:Gold Flash/Tin				
	SN:Tin				

				OPERATION		DRAW	WZG	14.05.13	SCALE	FIT	FLYING INTERNATIONAL	
				X.X	±0.30				UNIT	mm		
A1	2014.05.08	DIP尺寸更改为3.2	①	X.XX	±0.20	CHECK			SIZE	A4	PART NO.	3310XXSXXXXXX01
A0	2012.03.28	NEW DRAWING		X.XXX	±0.10				SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3°	APPROVE			PROJ.	①	TITLE:	2.54 ejector header Npin 180°
DIM					TOL							