





SPECIFICATIONS

Rated Current:1.50AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:800MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

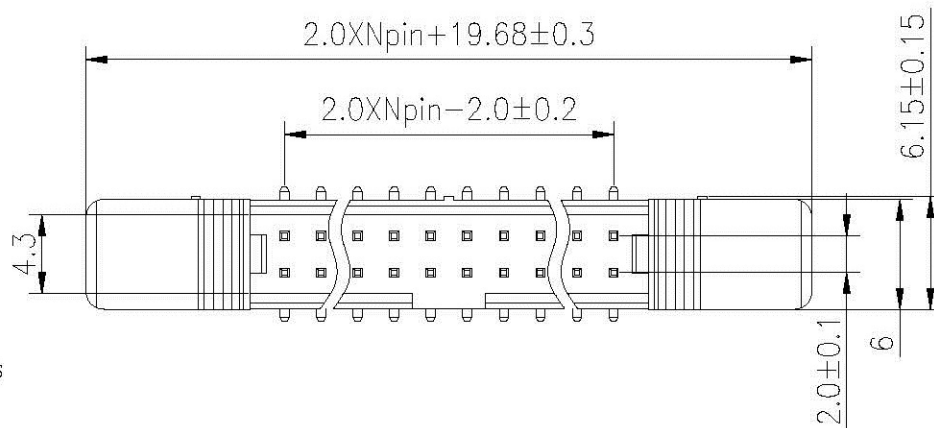

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

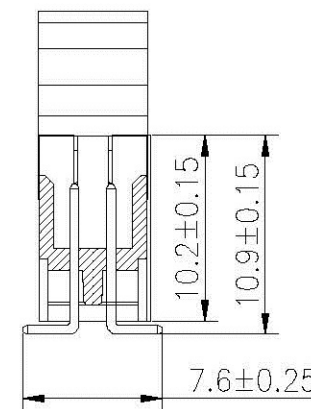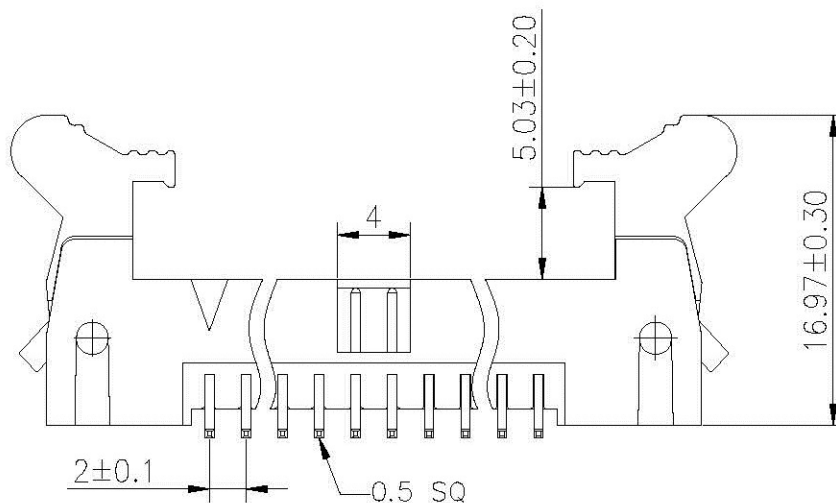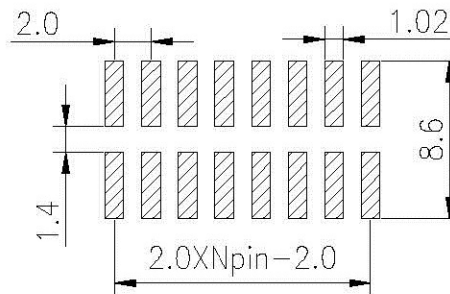

Ordering Information

3320 XX M XX X X M X 01

No. of Pins 6--64	Contact Plating	Insulator Material Option	Color Type	Latch Type	Packing
	G0:Gold Flash	A=BK-PBT	B=Black	M=Middle Latch	O=PE Bag
	G1:2U" Gold	B=BK-PA66	G=Grey		A=Tray
	G2:5U" Gold	C=BK-PA6T			T=Tube
	G3:10U" Gold	D=BK-PA46			R=Reel+Cap
	G4:15U" Gold	E=BK-PA9T			
	G5:30U" Gold	F=BK-LCP			
	S0:Gold Flash/Tin				
	SN:Tin				

				OPERATION		DRAW	YiYuSheng	12.10.05	SCALE	FIT	FLYiNG INTERNATIONAL	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	3320XXMXXXXMX01
A0	2012.10.05	NEW DRAWING		X.XXX	±0.10				SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	Angle	±3°	APPROVE		PROJ.		TITLE:	2.0 ejector header Npin SMT Middle Latch
				DIM	TOL							