





SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

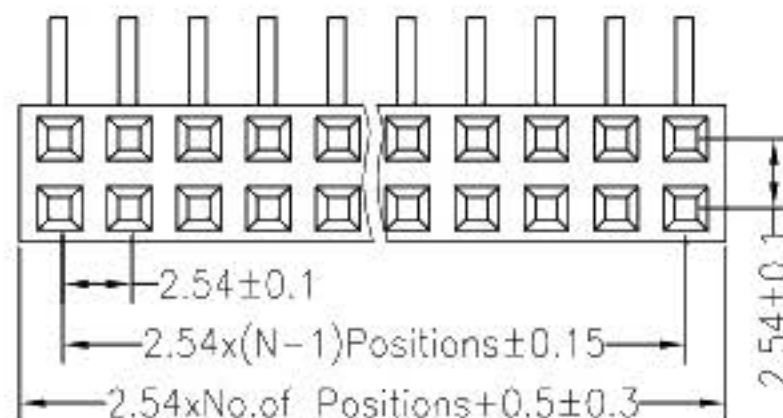

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

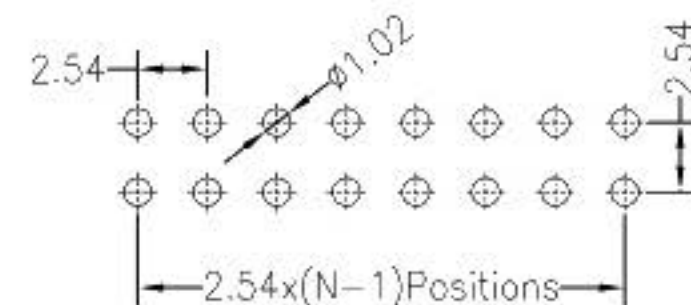

Ordering Information



2257 -02 XX X N XX RY X01

No. of Pins
2*2~2*40

Insulator Material
Option
A=BK-PBT
B=BK-PA66
C=BK-PA6T
D=BK-PA46
E=BK-PA9T
F=BK-LCP

Contact Plating
G0:Gold Flash
G1:3U" Gold
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold
S0:Gold Flash/Tin
SN:Tin

Packing
O=PE Bag
A=Tray
T=Tube
P=Tube+Cap

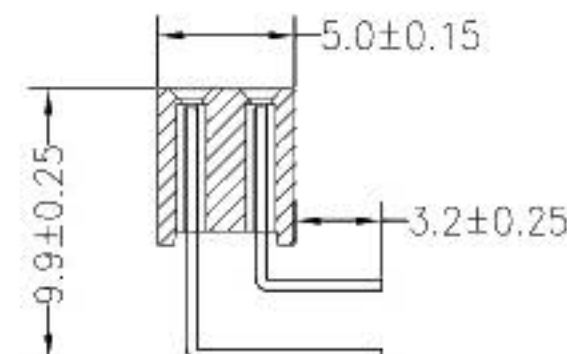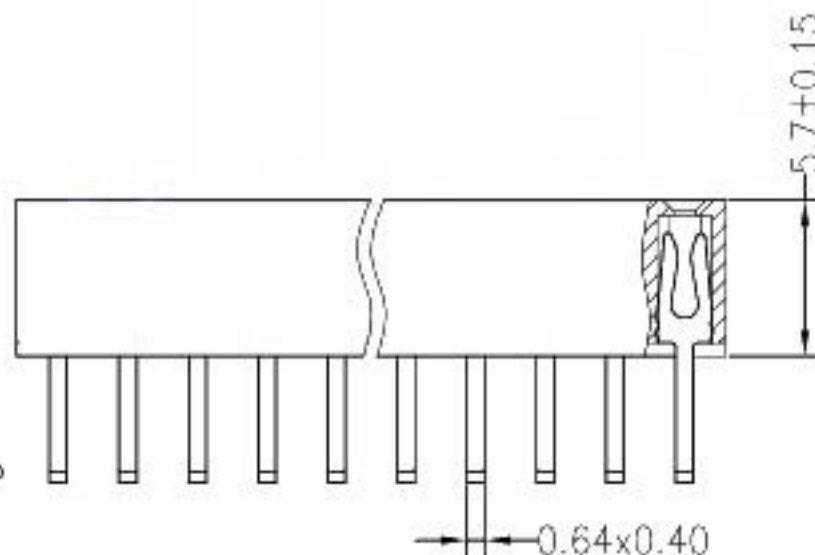

				OPERATION		DRAW	YiYuSheng	12.04.26	SCALE	FIT	FLYiNG 汎翊國際有限公司	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO. 225702XXXNXXRYX01	
				X.XXX	±0.10				SHEET	1/1		
AO	2012.04.26	NEW DRAWING		Angle	±3°	APPROVE			PROJ.		TITLE: 2.54PF H5.7mm 2xNpin 90° DIP	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL							