

SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C


Contact Material:Phosphor Bronze

Contact Plating:Au Over Ni


Insulator Material:Polyester(UL94V-0)

Standard: PA9T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

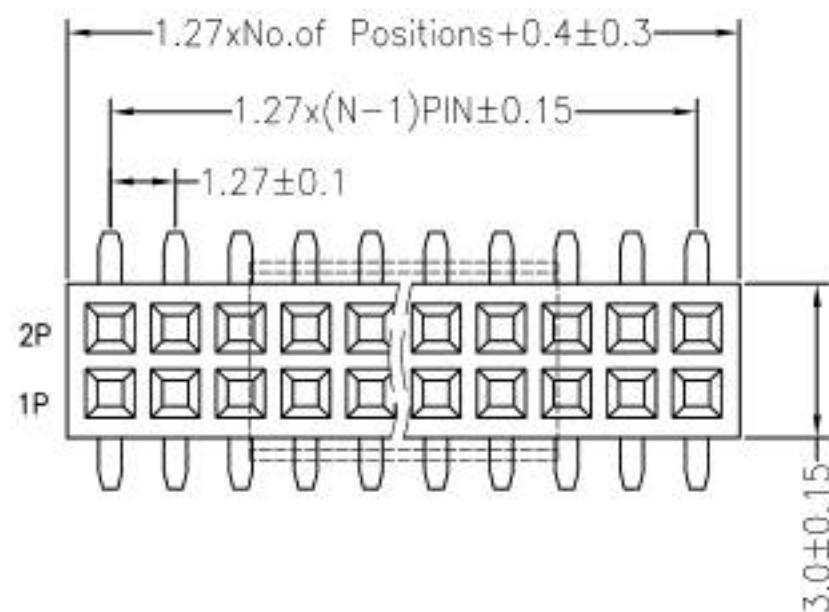

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

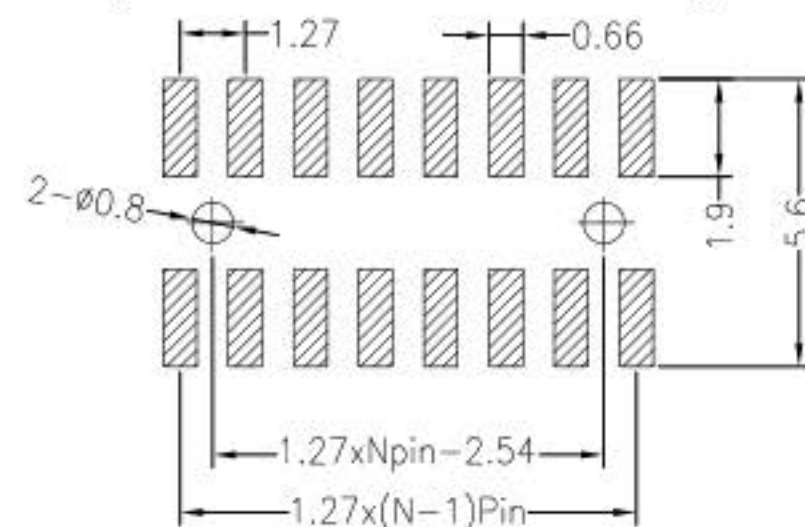

Ordering Information

2434 02 XX X X XX M U X 01



No. of Pins
Per Row
2*1~2*50

Insulator Material
Option
A=BK-PBT
B=BK-PA66
C=BK-PA6T
D=BK-PA46
E=BK-PA9T
F=BK-LCP

Post
W=With Post
N=W/O Post

Contact Plating
G0:Gold Flash
G1:3U" Gold
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold
S0:Gold Flash/Tin
SN:Tin

Packing
T=Tube
P=Tube+Cap
R=Reel+Cap
M=Reel+Mylar

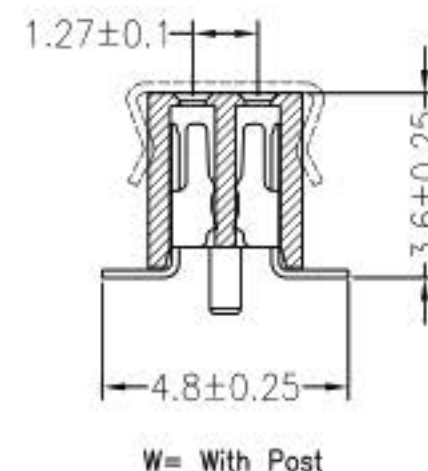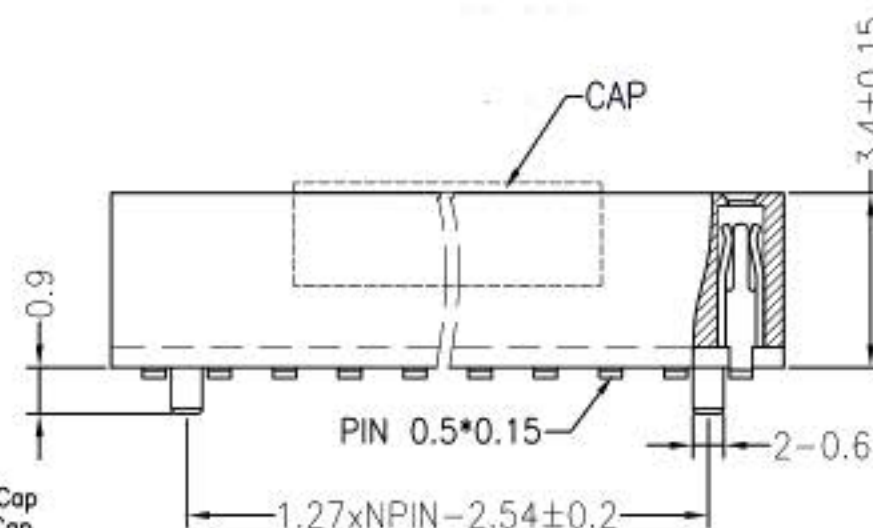

OPERATION

X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3°
DIM TOL

DRAW

BEN

12.04.18

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

FLYiNG 汎翊國際有限公司

PART NO.

243402XXXXXXMUX01

TITLE:

1.27PF 2xNPin H3.4 W3.0

A0 2012.04.18 NEW DRAWING

REV DATE MODIFICATION DESCRIPTION

CHANGE