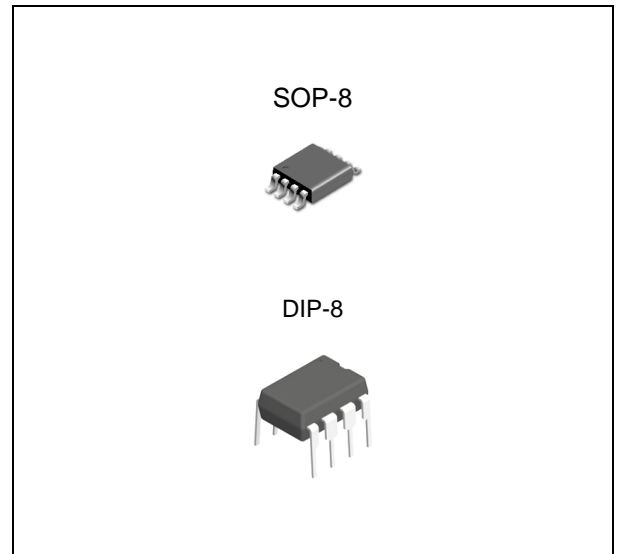


**FEATURES**

- Exact equivalent in most cases for SE/NE555
- Low Supply Current
- High speed operation – 500KHz guaranteed
- Wide operation supply voltage range - 2V to 18V
- Timing from microseconds through hours
- Operates in both astable and monostable modes
- Adjustable duty cycle
- High output source/sink driver can drive TTL/CMOS

**APPLICATION**

- Precision timing
- Pulse generation
- Sequential timing
- Time delay generation
- Pulse width modulation
- Pulse position modulation
- Missing Pulse detector

**ORDERING INFORMATION**

Device	Package
NE555D	SOP-8
NE555N	DIP-8

**DESCRIPTION**

The NE555 is CMOS RC timers providing significantly improved performance over the standard SE/NE555 and 355 timers, while at the same time being direct replacements for those devices in most applications. Improved parameters include low supply current, wide operating supply voltage range, low THRESHOLD, TRIGGER and RESET currents, no crowbarbing of the supply current during output transitions, higher frequency performance and no requirement to decouple CONTROL VOLTAGE for stable operation. Specifically, the NE555 is stable controller capable of producing accurate time delays of frequencies.

**ABSOLUTE MAXIMUM RATINGS** (Note 1)


CHARACTERISTIC	SYMBOL	MIN.	MAX.	UNIT
Supply Voltage	$V_{CC}$	0	18	V
Output Current	$I_O$	-	100	mA
Input Voltage	$V_{TH}, V_{TRIG}, V_{RST}$	-0.3	$V_{CC}+0.3$	V
Storage Temperature Range	$T_{STG}$	-65	150	°C
Operating Junction Temperature Range	$T_{OPR}$	-20	85	°C

**RECOMMENDED OPERATING RATINGS** (Note 2)



CHARACTERISTIC	SYMBOL	MIN.	MAX.	UNIT
Supply Voltage	$V_{CC}$	2	18	V
Operating Junction Temperature Range	$T_{OPR}$	-20	70	°C

**ORDERING INFORMATION**

Order No.	Package	Description	Supplied As	Status
NE555D	SOP-8	General Purpose Timer	Reel	Active
NE555N	DIP-8	General Purpose Timer	Tube	Contact Us

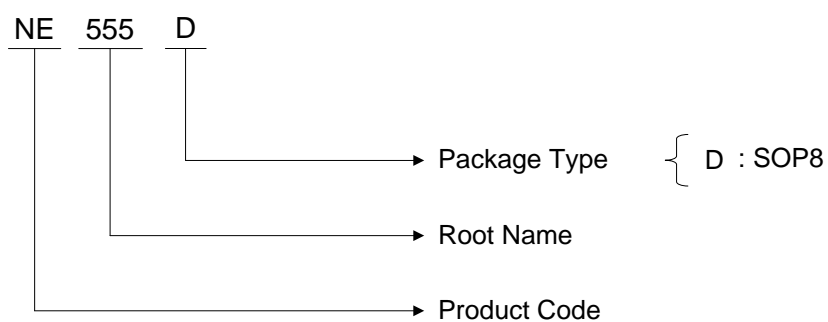


## PIN CONFIGURATION

SOP-8	DIP-8
<p>(Top View)</p> 	<p>(Top View)</p> 


## PIN DESCRIPTION

Pin No.	Name	Function
1	GND	Supply ground
2	$\overline{\text{TRIGGER}}$	Start timer input; (Active LOW)
3	OUTPUT	Timer logic level output
4	$\overline{\text{RESET}}$	Timer inhibit input; (Active LOW)
5	CONTROL VOLTAGE	Timing capacitor upper voltage sense input
6	THRESHOLD	Timing capacitor lower voltage sense input
7	DISCHARGE	Timing capacitor discharge output
8	VCC	Supply voltage

## FUNCTIONAL DIAGRAM

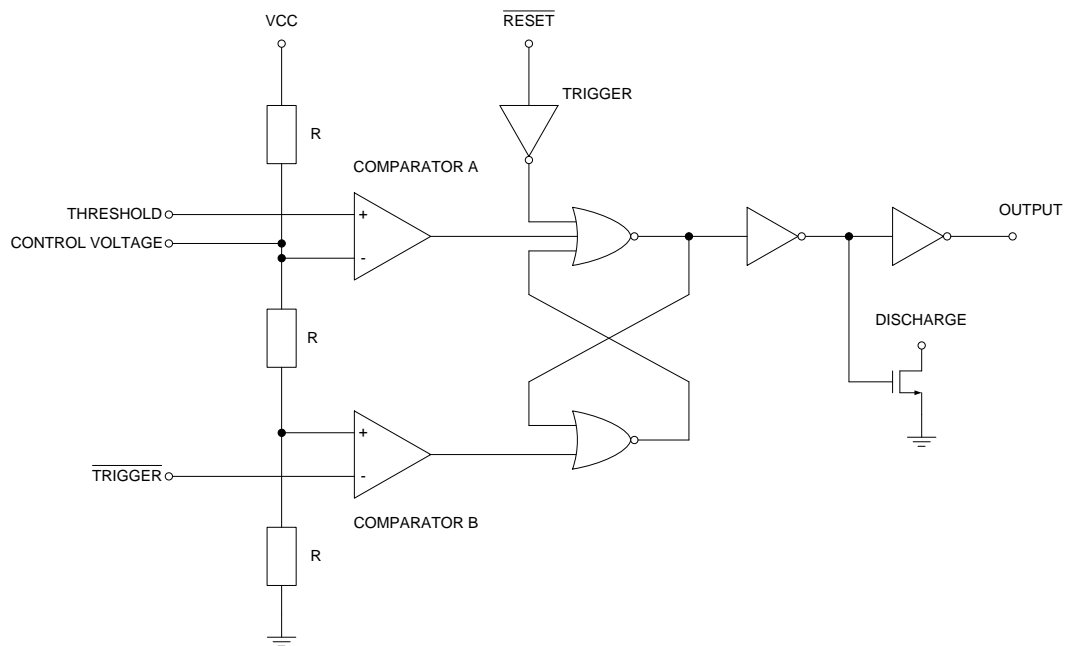

## SWITCHING WAVEFORMS

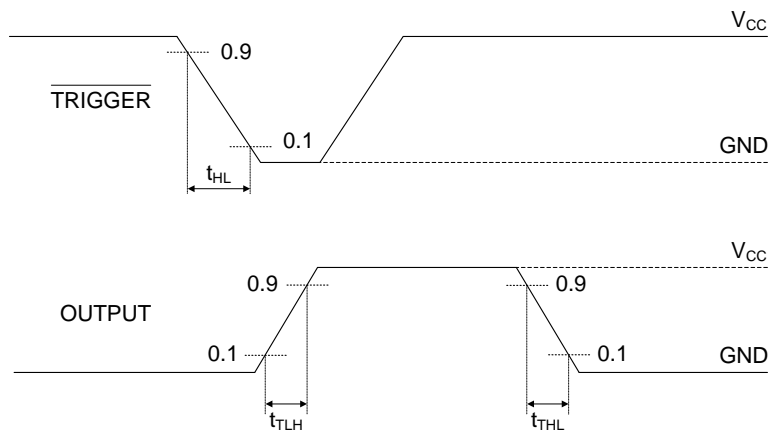

## TRUTH TABLE

THRESHOLD	$\overline{\text{TRIGGER}}$	$\overline{\text{RESET}}$	OUTPUT	DISCHARGE
X	X	L	L	ON
$> 2/3V_{CC}$	$> 1/3V_{CC}$	H	L	ON
$< 2/3V_{CC}$	$> 1/3V_{CC}$	H	STABLE	STABLE
X	$< 1/3V_{CC}$	H	H	OFF

## ELECTRICAL CHARACTERISTICS (Note 3)

Limits in standard typeface are for  $T_J = 25^\circ\text{C}$ , and limits in **boldface type** apply over the full operating temperature range.  $V_{CC}=5\text{V}$ , unless otherwise specified.

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
DC ELECTRICAL CHARACTERISTICS						
Threshold Voltage	V <sub>TH</sub>	V <sub>CC</sub> = 5V	3.2		3.5	V
		V <sub>CC</sub> = 15V	9.6		10.5	
Trigger Voltage	V <sub>TRIG</sub>	V <sub>CC</sub> = 5V	1.55		1.8	V
		V <sub>CC</sub> = 15V	4.6		5.4	
Reset Voltage	V <sub>RST</sub>	V <sub>CC</sub> = 2V, 15V, 18V	0.4		1.0	V
Control Voltage	V <sub>CV</sub>	V <sub>CC</sub> = 5V	3.2		3.5	V
		V <sub>CC</sub> = 15V	9.6		10.5	
Output Voltage (Low)	V <sub>OL</sub>	V <sub>CC</sub> = 5V, I <sub>OL</sub> = 3.2mA			0.4	V
		V <sub>CC</sub> = 15V, I <sub>OL</sub> = 20mA			1.0	
		V <sub>CC</sub> = 15V, I <sub>OL</sub> = 50mA			2.0	
Output Voltage (High)	V <sub>OH</sub>	V <sub>CC</sub> = 5V, I <sub>OH</sub> = -0.8mA	4.0			V
		V <sub>CC</sub> = 15V, I <sub>OH</sub> = -0.8mA	14.3			
		V <sub>CC</sub> = 15V, I <sub>OH</sub> = -10mA	12.5			
Supply Current	I <sub>CC</sub>	V <sub>CC</sub> = 2V			200	μA
		V <sub>CC</sub> = 18V			300	
AC ELECTRICAL CHARACTERISTICS						
Rise/ Fall Time of Output	t <sub>THL</sub> , t <sub>TLH</sub>	V <sub>CC</sub> = 5V, R <sub>L</sub> = 10MΩ, C <sub>L</sub> = 10pF		35		ns
					150	
Guaranteed Max Osc Freq.	f <sub>MAX</sub>	V <sub>CC</sub> = 5V, astable mode	500			kHz
Initial Accuracy		R <sub>L</sub> = 1 to 100KΩ, C <sub>L</sub> = 0.1μF	5			%
Drift with Temperature	αf	V <sub>CC</sub> = 5V, R <sub>L</sub> = 1 to 100KΩ, C <sub>L</sub> = 0.1μF			0.02	% / °C
		V <sub>CC</sub> = 10V, R <sub>L</sub> = 1 to 100KΩ, C <sub>L</sub> = 0.1μF			0.03	
		V <sub>CC</sub> = 15V, R <sub>L</sub> = 1 to 100KΩ, C <sub>L</sub> = 0.1μF			0.06	
Drift with Supply Voltage	Δf	V <sub>CC</sub> = 5V, R <sub>L</sub> = 1 to 100KΩ, C <sub>L</sub> = 0.1μF			3	% / V
					6	

Note 1. Exceeding the absolute maximum ratings may damage the device.

Note 2. The device is not guaranteed to function outside its operating ratings.

Note 3. Stresses listed as the absolute maximum ratings may cause permanent damage to the device. These are for stress ratings. Functional operating of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may remain possibly to affect device reliability.

Note 4. Parameters are not 100% tested. Majority of all units meet this specification.

## APPLICATION INFORMATION

T.B.D.

**REVISION NOTICE**

The version of this document is including preliminary information. Thus the description in this datasheet can be revised without any notice to describe its electrical characteristics properly. Its version also can be changed to a production level. Please contact us to get the latest version of datasheet.