
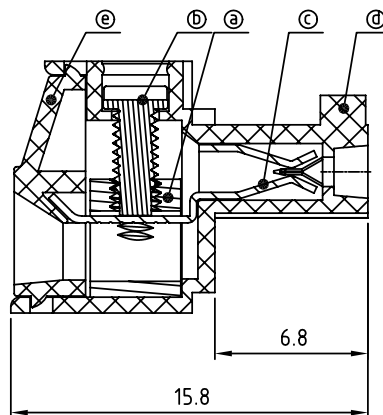
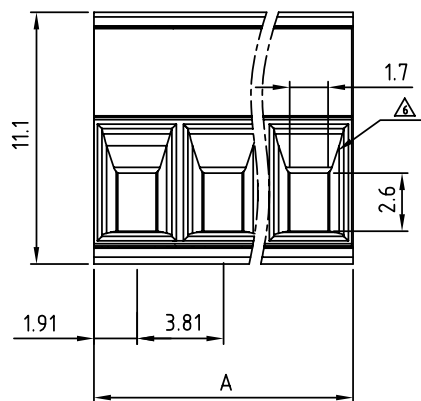


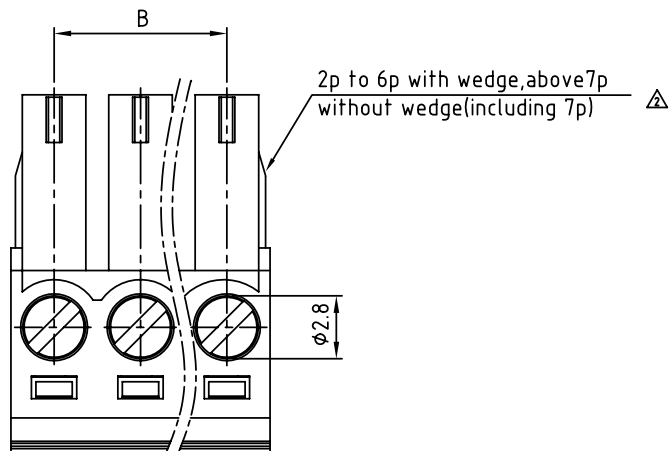

N = Number of poles
Dim A = N x 3.81
Dim B = (N - 1) x 3.81

	Dim A	Dim B
2-6p	±0.15	±0.15
7-12p	±0.20	±0.20
13-18p	±0.25	±0.25
19-24p	±0.30	±0.30

SIGN	DATE	DESCRIPTION	APPROVER
△	11/01'05	Electrical standard changed.	Marvin
△	04/20'06	2p to 6p with wedge is changed.	Marvin
△	8/13'06	Added VDE standard	黎仁松
△	12/04'08	Add the tolerance table	Jacke
△	12/04'08	The temperature changed from -30°,105° to -40°,115°	Jacke
△	12/04'08	The wire entry hole was changed.	Jacke
△	2010.07.12	The solid and Stranded wire is changed from 16-26 to 16-28	Chen Bo
△	2010.07.12	Remove the CSA mark	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item a Clamp: Brass(CuZn) Ni plated
- Item b Terminal screw: Steel Zinc plating "-" slot type
- Item c Female contact: PhBz, Tin plated
- Item d Terminal (housing): Thermoplastic (UL94V-0)
- Item e Terminal (cover): Thermoplastic (UL94V-0)

△ △ Electrical cULus/VDE

- Voltage rating: 300VAC/300VAC
- Current rating: 10A/10.5A
- Wire range: 1.5mm²
- △ ● Solid wire(AWG): 16-28/16-28
- Stranded wire(AWG): 16-28/16-28
- Torque: 3Lb-In/0.2Nm
- Screw: M2
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2.5KV
- △ ● Operating temperature: -40°C to +115°C
- △ ● Safety Approval:

TJ xx 31x 3 xxxx G

- | | | | |
|-----|-------------|---|-------------------|
| 02 | 2 CONTACTS | 0 | Black (RAL9005) |
| 03 | 3 CONTACTS | 2 | Red (RAL3001/D) |
| ... | ... | 3 | Orange(RAL2011/P) |
| 24 | 24 CONTACTS | 4 | Yellow(RAL1018/A) |
| | | 5 | Green(RAL6018/T) |
| | | 6 | Blue (RAL5015/A) |
| | | 8 | Grey(RAL7035/D) |

RoHS
Pb<4,000ppm

0000: "@" Logo
000A: "ANYTEK" Mark
Any special item by customer request.
please contact sales department.

FLYiNG 汎翊國際有限公司

TITLE	TJ-3.81mm Series			
PART NO.	TJxx31x3xxxxG			DWG NO. 8TJ0601
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.
			Chen Bo 2010.07.12	
SHEET: 01/01				Tolerance
				X. ±0.50
				X.X ±0.30
				X.XX ±0.10
				X° ±1°