


characteristics table

Rated Voltage (V)	Nominal Capacitance (120Hz, 20°C) (μF)	φ D	L	ESR (100K~300KHz) (m Ω) (max)	Max Ripple Current (100KHz) (mA rms)		Leakage Current (μA) (max)	DF (tanδ) (120Hz, 20°C) (max)	Part Number
					$105 < T_x \leq 125^\circ\text{C}$	$T_x \leq 105^\circ\text{C}$			
25	100	6.3	9	50	480	1200	500	0.12	GMR100M025-0609TR

DIAGRAM OF DIMENSIONS

■ Drawing

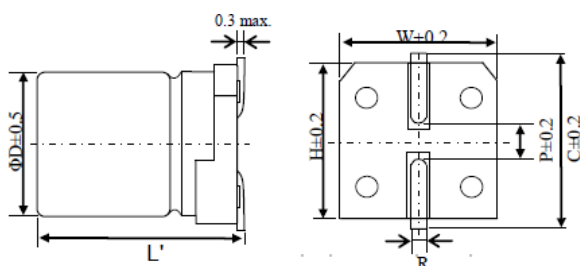

Unit: mm

φ D	6.3
L' +0.5	9.0
W ±0.2	6.6
H ±0.2	6.6
C ±0.2	7.3
R	0.5~0.8
P ±0.2	1.9

Item	Performance	
Operating Temperature	-55°C ~ +125°C	
Capacitance Tolerance	-20 % ~ +20 % (120 Hz, 20°C)	
Leakage Current	Value in characteristics table	After 2 minutes
Dissipation Factor (Tanδ)	Value in characteristics table	(120 Hz, 20°C)
E S R	Value in characteristics table (100K ~ 300K Hz, 20°C)	
Ripple Current(rms, 100K Hz)	Value in characteristics table (105°C)	
Load Life (After 125°C, 1,000 hrs, rated voltage applied)	Capacitance Change	Within ±30 % of initial value
	Dissipation factor	Less than 300% of specified value
	E.S.R.	Less than 300% of specified value
	Leakage Current	Within specified value
Moisture Resistance (After 60°C, 90~95%RH, 1000 hrs, no voltage)	Capacitance Change	Within ±20 % of initial value
	Dissipation factor	Less than 150% of specified value
	E.S.R.	Less than 150% of specified value
	Leakage Current	Within specified value

*Leakage current should be tested after voltage treatment.

Publish Date

2019/07/23

Parameter :

Revise Date

Edition No.

1