
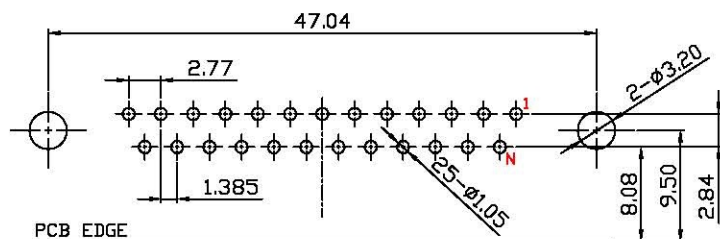
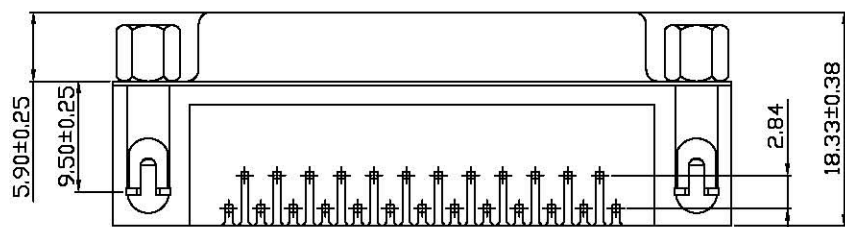


H
G
F
E
D
C
B
A

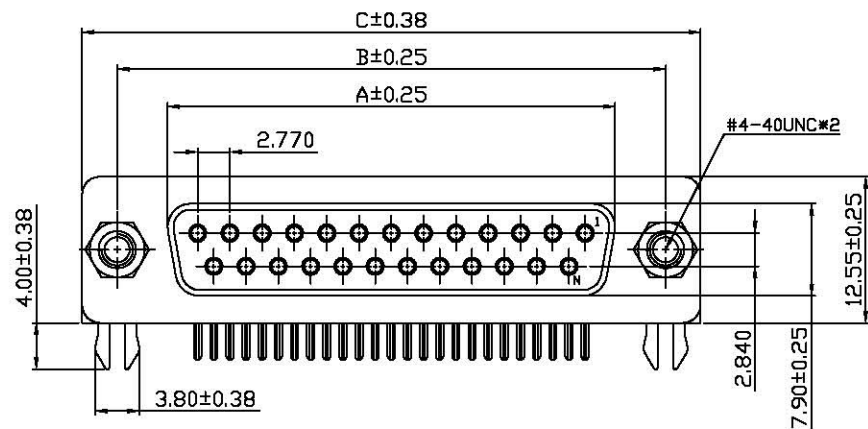


P.C.B. LAYOUT

MATERIALS:

1. Housing: PBT (UL 94V-0), Black
2. Contacts: Brass
3. Shell: SPCC
4. Board Lock: SPCC
5. Screw: SPCC(Lead ≤ 40000PPM)

FINISH:

1. Contacts: Gold Flash Plated on Contact Area
Sn Plated on Solderails
Nickel Under-Plated Over All
2. Shell: Nickel Plated
3. Board Lock: Sn Plated
4. Screw: Nickel Plated



僅供參考

NO. OF POS.	A	B	C
09	16.33	24.99	30.80
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	55.42	63.50	69.32

B

A

FLYiNG

TITLE / 品名: D-Sub R/A G/F XXF(8.08mm) PBT Black W/S(11.8mm/4.8mm) Dip RoHS

核准發行章

PART NO / 料號: BRI-DSDU-37FR-808-48-PBT

APPROVE / 核准	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號
James	James	Chenrong	

UNIT / 單位	Φ	TR
mm		
	SHEET 1 OF 1	

GENERAL TOLERANCE
X ±0.50
.X ±0.38
.XX ±0.20
.XXX ±0.10

NO.	REV / 版本	修訂內容	日期
1.0		圖面僅供參考, 實際尺寸以承認圖為主	2012/11/15