




P.C.B Hole Layout

Specifications


Current Rating	: 4A AC,DC
Voltage rating	: 250V AC,DC
Temperature range	: - 25℃ ~ + 85℃
Contact resistance	: 10m Ω Max
Insulation resistance	: 1000M Ω Min
Withstanding voltage	: 1000 VAC/minute
Finished	: Tin-plated
Housing Material	: Nylon-66, UL94 V -2
Color	: Beige

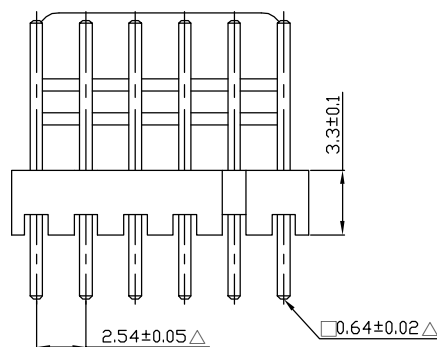

8PIN(含8PIN) 以下

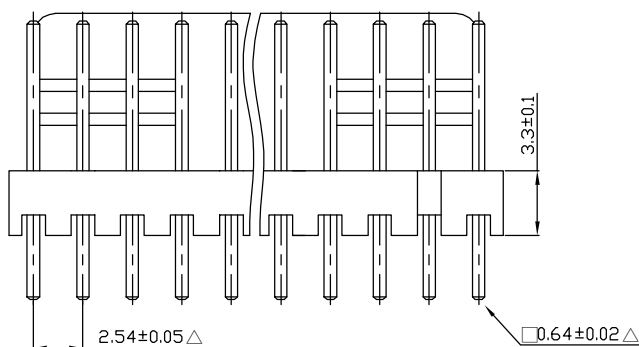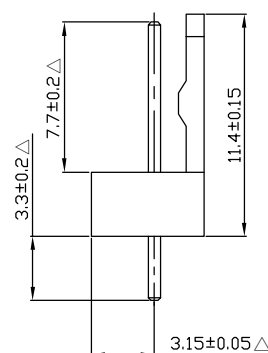

9PIN(含9PIN) 以上

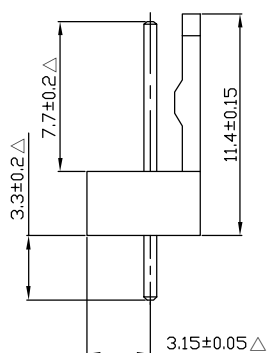

Circuits	Part No.	Dimension mm	
		A	B
02	CD-W254-02	2.54	5.08
03	CD-W254-03	5.08	7.62
04	CD-W254-04	7.62	10.16
05	CD-W254-05	10.16	12.70
06	CD-W254-06	12.70	15.24
07	CD-W254-07	15.24	17.78
08	CD-W254-08	17.78	20.32
09	CD-W254-09	20.32	22.86
10	CD-W254-10	22.86	25.40
11	CD-W254-11	25.40	27.94
12	CD-W254-12	27.94	30.48
13	CD-W254-13	30.48	33.02
14	CD-W254-14	33.02	35.56
15	CD-W254-15	35.56	38.10
16	CD-W254-16	38.10	40.64
17	CD-W254-17	40.64	43.18
18	CD-W254-18	43.18	45.72
19	CD-W254-19	45.72	48.26
20	CD-W254-20	48.26	50.80

FLYiNG
INTERNATIONAL

DESCRIPTION (内容):

MX 2.54mm Wafer 180° □=0.64
塑胶为米黄色(環保材料)

PART NO:
(料 號)

CD-W254-XX

DWG NO(圖號):

DRAWN(製圖):

王建平

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE :
(公差)

.X .XXXX
.XX .X°
.XXX .XX°

SCALE (比例):

1:XX

REV:
A/8

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

(1B.3D) 塑膠高度和寬度尺寸公差尺寸公差增大0.05

塑膠只能做16PIN

增加PIN數到20PIN

DATE

2007.03.10

2007.08.17

2010.04.14

2012.02.08