

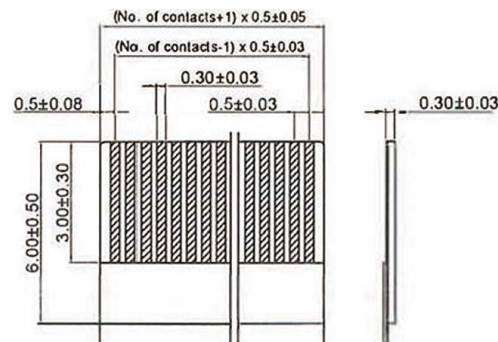
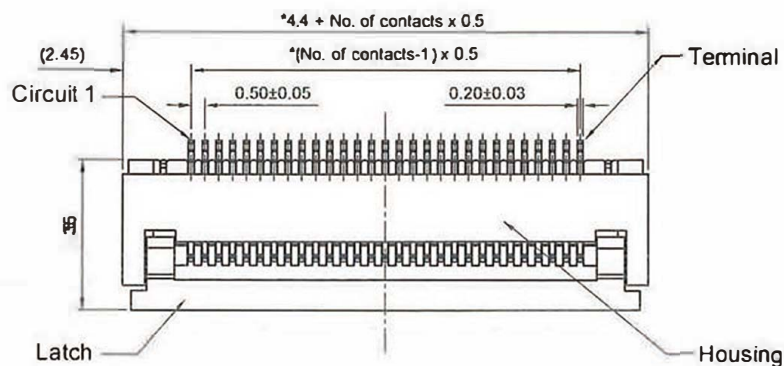

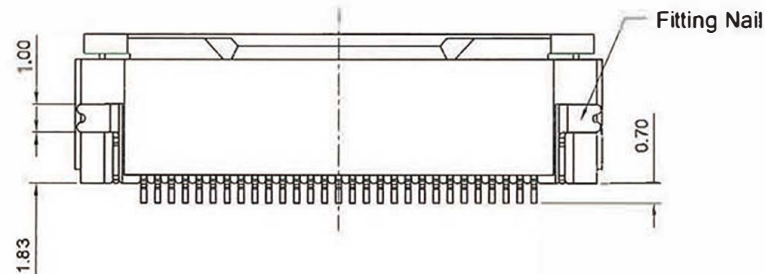





Specifications
 Poles : 04P ~ 60P
 Current Rating : DC 0.4A max.
 Voltage Rating : AC 50V max.
 Insulation Resistance : 500 MΩ min.
 Contact Resistance : 30 mΩ max.
 Dielectric Withstanding : AC 200 V
 Operating Temperature : -45°C ~ +85°C
 Contact Material : Phosphor Bronze
 Fitting Nail Material : Brass
 Housing Material : LCP, UL 94V-0 (Natural)
 Latch Material : LCP, UL 94V-0 (Black)
 Finish : 120μ" Matte tin plated on contact area

FP4ZUA_xTM4_x
 Packing
 T : Tube
 R : Tape & Reel
 No. of contacts

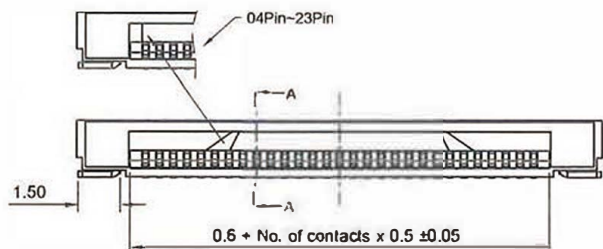

Section A-A

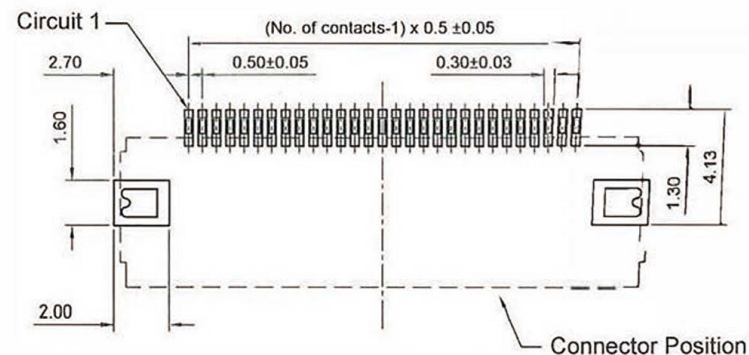

Recommended P.C.B. Layout