
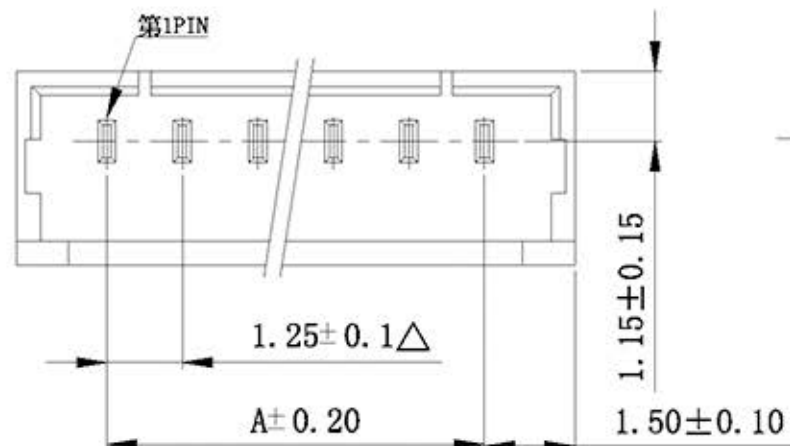
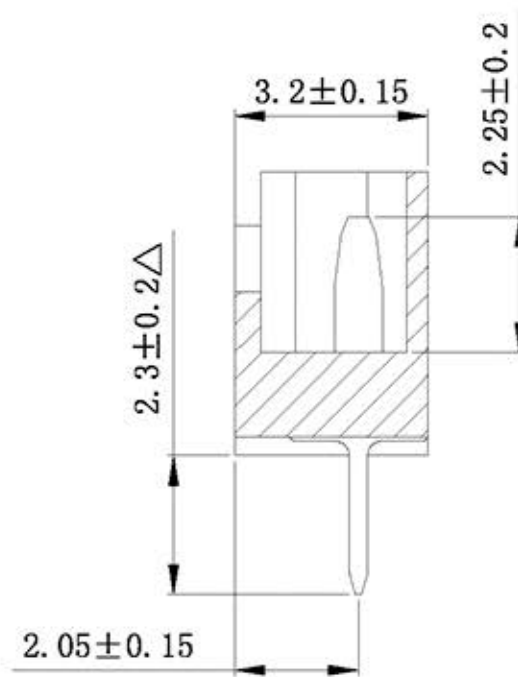


SPECIFICATIONS

Current rating	:1A AC, DC
Voltage rating	:125V AC, DC
Temperature range	: -25° C ~ +85° C
Contact resistance	: 20mΩMax
Insulation resistance	: 100MΩMin
Withstanding voltage	: 500 V AC/minutePin
Material	: Copper Alloy
Finished	: Tin-plated
Housing Material	: Nylon-6T, UL94 V-0
Color	: Beige

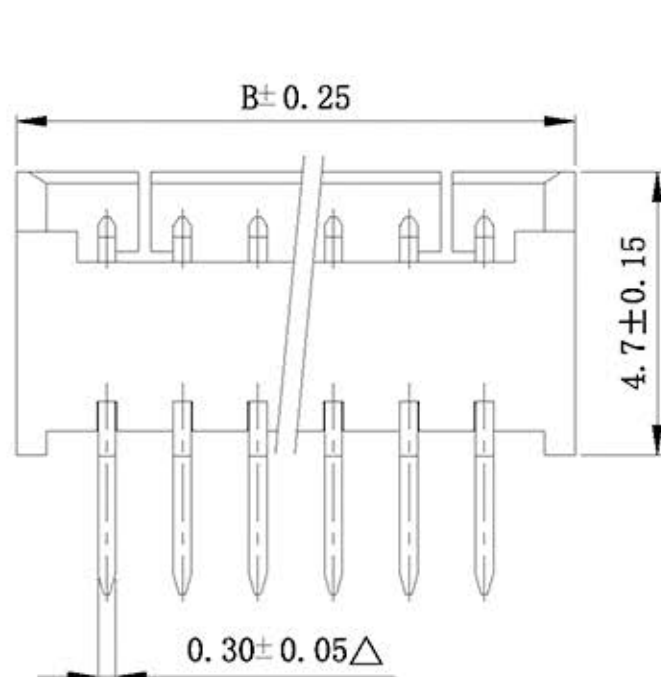

Ordering Information & Dimensions

Part No.	Dimensions	
	A	B
CCX-W125-02-DIP	1.25	4.25
CCX-W125-03-DIP	2.50	5.50
CCX-W125-04-DIP	3.75	6.75
CCX-W125-05-DIP	5.00	8.00
CCX-W125-06-DIP	6.25	9.25
CCX-W125-07-DIP	7.50	10.50
CCX-W125-08-DIP	8.75	11.75
CCX-W125-09-DIP	10.00	13.00
CCX-W125-10-DIP	11.25	14.25
CCX-W125-11-DIP	12.50	15.50
CCX-W125-12-DIP	13.75	16.75
CCX-W125-13-DIP	15.00	18.00
CCX-W125-14-DIP	16.25	19.25
CCX-W125-15-DIP	17.50	20.50

FLYiNG

DESCRIPTION (内容)
1.25mm Wafer 180°
(環保材料)
PART NO:
(料號) CCX-W125-XX-DIP
DWG NO(圖號):

DRAWN(製圖): 黃炳秋
CHECKED(確認):
APPROVAL(核准):

GENERAL TOLERANCE:
(公差)
.0 ±0.20
.00 ±0.15
.000 ±0.10
SCALE(比例):
1:XX

REV:
A/9
UNIT:
mm
SIZE:
A4
SHEET:
1/1

REV	DESCRIPTION	DATE
1	△此符號表示重點管接尺寸	2007.07.26
2	(3C)尺寸2.2變更爲2.3	2007.08.15
3	銅鍍金: CC-W125-XX-DIP 五金材質: 鍍金銅合金與鋼	2008.01.30 2008.04.11
9	增加尺寸	2013.07.08