





P/N: CBTB-08MB-AXXX



所有材料為
"環保材料"
2014.9.10
RoHS

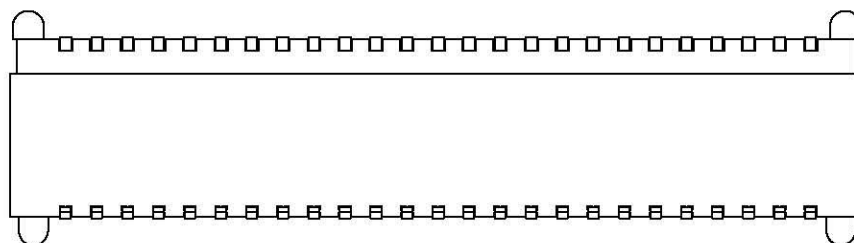

P/N: CBTB-08FB-AXXX



NOTE

A. Material:

1. Housing : Nylon-9T Halogen Free
UL94V-0, Black

2. Contact : Copper Alloy

B. Plating : Gold Plating.

C. Temperature: -55°C to +125°C

D. Electrical:

1. Voltage : 50V.

2. Current : 0.5A.

3. Contact Resistance : 40mΩ max.

4. Dielectric Withstanding Voltage :
500V AC / 1 min.

5. Insulation Resistance : 100MΩ min.

E. Available Pins : 10~100 Contacts

FLYiNG

DESCRIPTION(內容):

0.80mm (0.031") Pitch Board To Board
Connector Male+Female H=4.60mm

PART NO:
(料號)

DWG NO(圖號): 0846B

DRAWN(製圖):

GONG

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

.X ±0.25
.XX ±0.10
.XXX ±0.05

SCALE(比例):

FREE



REV:

R1

UNIT:

mm

SIZE:

A4

SHEET:

1/3

REV

R0

R1

R2

R3

DESCRIPTION



RELEASE/2014改為無鹵料

變更圖號(原:BTB-0846-B)

DATE



2014.09.10

2014.09.16

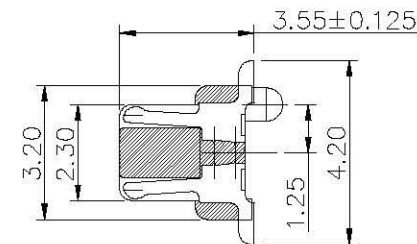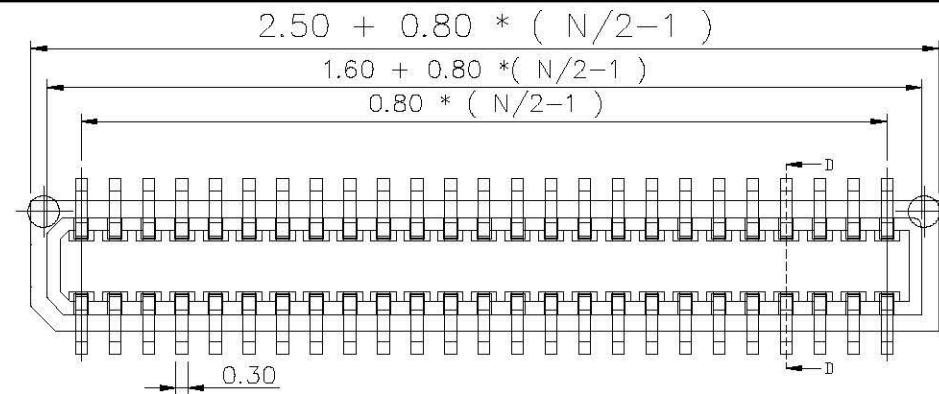

D-D

所有材料為
"環保材料"
2007.6.14
RoHS

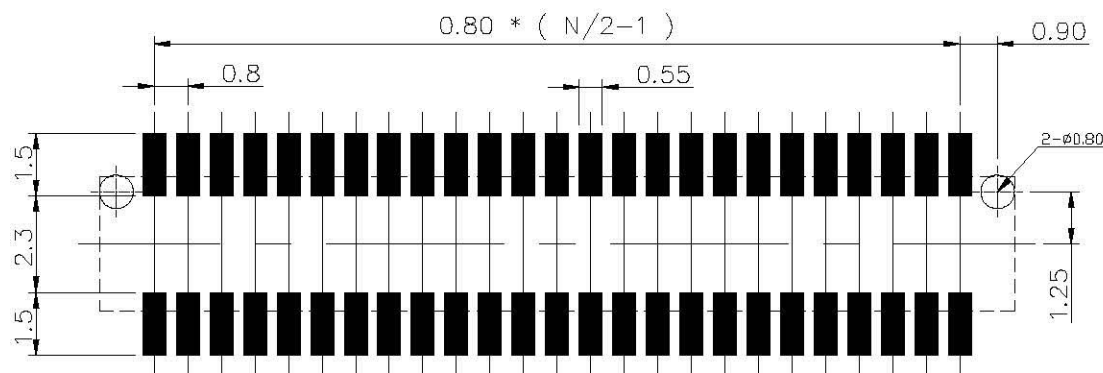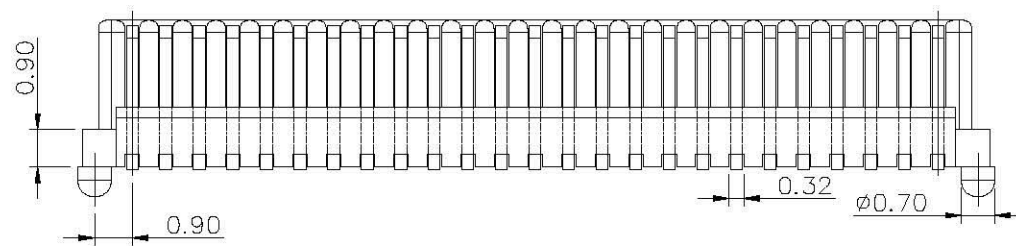

PCB Layout For
Surface Mounting

NOTE

A. Material:

1. Housing : Nylon-9T Halogen Free,
UL94V-0, Black

2. Contact : Copper Alloy

B. Plating: Gold plating

C. Temperature: -55°C to 125°C

D. Electrical:

1. Voltage : 50V.

2. Current : 0.5A.

3. Contact Resistance : 40m Ω max.

4. Dielectric Withstanding Voltage :
500V AC / 1 min.

5. Insulation Resistance : 100M Ω min.

Available Pins : 10~100 Contacts

FLYiNG

DESCRIPTION(內容):
0.80mm (0.031") Pitch
Board To Board
Male connector H=3.55mm

PART NO:
(料 號) **CBTB-08MB-AXXX**

DWG NO(圖號): **BTB-08P-AXXXB**

DRAWN(製圖):

Gong

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)
.X ±0.30
.XX ±0.250
.XXX ±0.20

SCALE(比例):
FREE

REV:

R2

UNIT:

mm

SIZE:

A4

SHEET:

2/3

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

變更Contact材質:Phosphor Bronze→Copper Alloy

2014改為無鹵料/料號更新(原:CBTB-08M-AXXX)



圖號更新(原:BTB-08P-A010)

DATE

2007.06.14

2009.06.19

2014.09.09


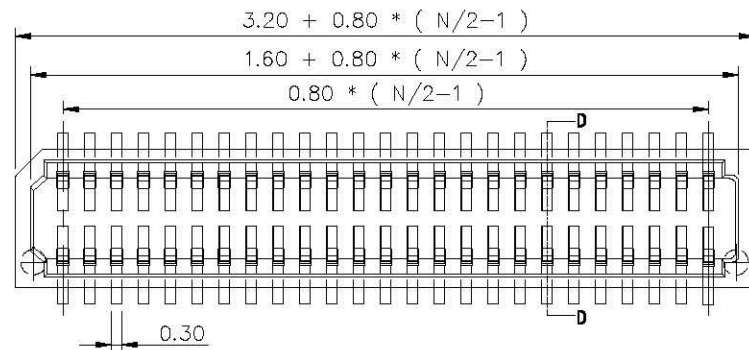


D-D

所有材料為
"環保材料"

2008.4.18

RoHS

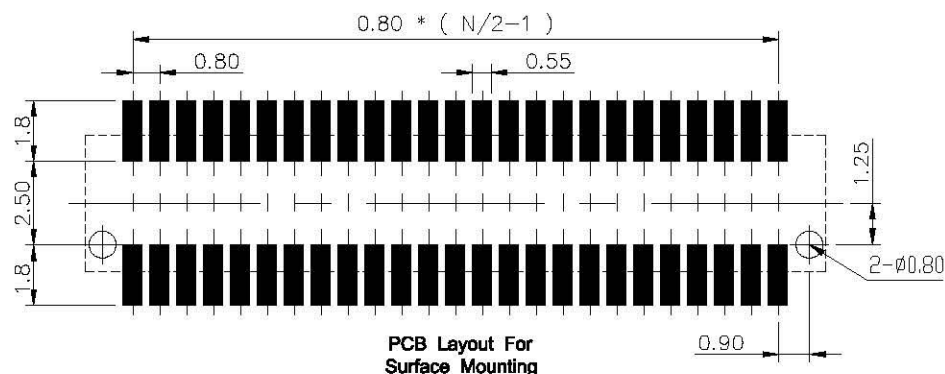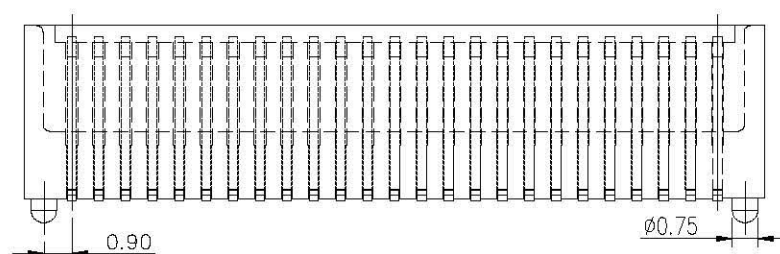

NOTE

A. Material:

1. Housing : Nylon-9T Halogen Free
UL94V-0,Black

2. Contact : Copper Alloy

B. Plating : Gold Plating.

C. Temperature: -55°C to +125°C

D. Electrical:

1. Voltage : 50V.

2. Current : 0.5A.

3. Contact Resistance : 40mΩ max.

4. Dielectric Withstanding Voltage :
500V AC / 1 min.

5. Insulation Resistance : 100MΩ min.

E. Available Pins : 10~100 Contacts

FLYiNG

DESCRIPTION(內容):
0.80mm (0.031") Pitch Board To Board
Female connector H=3.55mm
PART NO:
(料 號) CBTB-08FB-AXXX
DWG NO(圖號): BTB-08R-AXXXB

DRAWN(製圖):
GONG
CHECKED(確認):
MANDY
APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
(公差)
.X ±0.25
.XX ±0.10
.XXX ±0.05
SCALE(比例):
FREE

REV:
R2
UNIT:
mm
SIZE:
A4
SHEET:
3/3

REV
R0
R1
R2
R3

DESCRIPTION
RELEASE
變更Contact材質:Phosphor Bronze→Copper Alloy
2014改為無鉛材料/料號更新(原:CBTB-08F-AXXX)
圖號更新(原:BTB-08R-AXXX)

DATE
2008.04.18
2009.06.18
2014.09.10