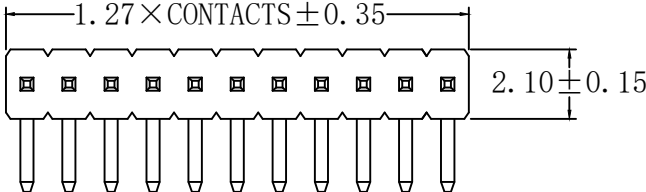
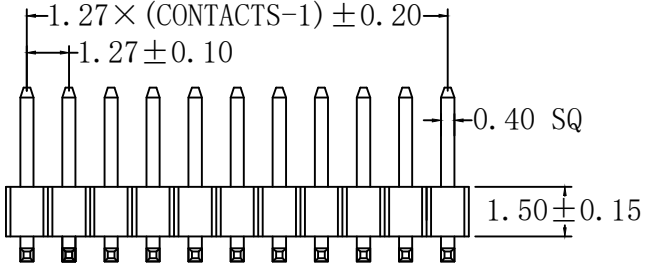

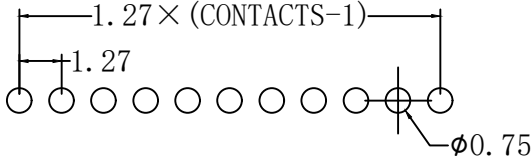





	1	2	3	4	5	6	7	8																																																																									
A	NOTES: 1. HOUSING:NY6T, UL94V-0 COLOR :BLACK 2. CONTACT:BRASS PLATED :GOLD FLASH 3. CURRENT : 1A 4. OPERATING TEMPERAURE : -55° C TO +105° C 5. CONTACT RESISTANCE : 20 MILLIOHMS Max. 6. INSULATION RESISTANCE: 1000 MEGAOHMS Min. 7. WITHSTAND VOLTAGE : 500 V AC/minute 8. MAJOR DIMENSION ▽ MUST BE CONTROLLED BY QIP.								A																																																																								
B									B																																																																								
C									C																																																																								
D	P127L66O105GNY6T 排針-1.27mm-90度-1*5PIN NY6T (塑高=1.5mm A=3mm B=1.6mm C:0.5mm)					A: 3.00 mm B: 1.60 mm C: 0.50 mm			D																																																																								
E	<table><tr><th colspan="4">CONTACTS</th></tr><tr><td></td><td>1×12</td><td>1×25</td><td>1×38</td></tr><tr><td></td><td>1×13</td><td>1×26</td><td>1×39</td></tr><tr><td></td><td>1×14</td><td>1×27</td><td>1×40</td></tr><tr><td>1×02</td><td>1×15</td><td>1×28</td><td>1×41</td></tr><tr><td>1×03</td><td>1×16</td><td>1×29</td><td>1×42</td></tr><tr><td>1×04</td><td>1×17</td><td>1×30</td><td>1×43</td></tr><tr><td>1×05</td><td>1×18</td><td>1×31</td><td>1×44</td></tr><tr><td>1×06</td><td>1×19</td><td>1×32</td><td>1×45</td></tr><tr><td>1×07</td><td>1×20</td><td>1×33</td><td>1×46</td></tr><tr><td>1×08</td><td>1×21</td><td>1×34</td><td>1×47</td></tr><tr><td>1×09</td><td>1×22</td><td>1×35</td><td>1×48</td></tr><tr><td>1×10</td><td>1×23</td><td>1×36</td><td>1×49</td></tr><tr><td>1×11</td><td>1×24</td><td>1×37</td><td>1×50</td></tr></table>			CONTACTS					1×12	1×25	1×38		1×13	1×26	1×39		1×14	1×27	1×40	1×02	1×15	1×28	1×41	1×03	1×16	1×29	1×42	1×04	1×17	1×30	1×43	1×05	1×18	1×31	1×44	1×06	1×19	1×32	1×45	1×07	1×20	1×33	1×46	1×08	1×21	1×34	1×47	1×09	1×22	1×35	1×48	1×10	1×23	1×36	1×49	1×11	1×24	1×37	1×50	P. C. B . LAYOUT					E																
CONTACTS																																																																																	
	1×12	1×25	1×38																																																																														
	1×13	1×26	1×39																																																																														
	1×14	1×27	1×40																																																																														
1×02	1×15	1×28	1×41																																																																														
1×03	1×16	1×29	1×42																																																																														
1×04	1×17	1×30	1×43																																																																														
1×05	1×18	1×31	1×44																																																																														
1×06	1×19	1×32	1×45																																																																														
1×07	1×20	1×33	1×46																																																																														
1×08	1×21	1×34	1×47																																																																														
1×09	1×22	1×35	1×48																																																																														
1×10	1×23	1×36	1×49																																																																														
1×11	1×24	1×37	1×50																																																																														
F				<table><tr><td>比例 (SCALE)</td><td>FREE</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>單位 (UNIT)</td><td>MM</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td colspan="2" rowspan="4">公差 (TOLERANCE) X. X ±0.38 X. XX ±0.25 X. XXX ±0.05</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>投影法 (PROJECTION)</td><td></td><td>A</td><td>2019-11-06</td><td>ZENG</td><td>LIU</td><td>HU</td><td></td></tr><tr><td></td><td></td><td>REV.</td><td>DATE</td><td>RAWN</td><td>CHECKED</td><td>APPRDVED</td><td></td></tr></table>			比例 (SCALE)	FREE							單位 (UNIT)	MM							公差 (TOLERANCE) X. X ±0.38 X. XX ±0.25 X. XXX ±0.05																										投影法 (PROJECTION)		A	2019-11-06	ZENG	LIU	HU				REV.	DATE	RAWN	CHECKED	APPRDVED		<table><tr><td colspan="2" rowspan="3"> FLYING INTERNATIONAL </td><td colspan="2">PIN HEADER</td></tr><tr><td colspan="2">1.27PH 90° H:1.50</td></tr><tr><td colspan="2">1*XXPIN</td></tr><tr><td colspan="2">圖號 (DRAW NO.)</td><td colspan="2"></td></tr></table>				FLYING INTERNATIONAL		PIN HEADER		1.27PH 90° H:1.50		1*XXPIN		圖號 (DRAW NO.)				F
比例 (SCALE)	FREE																																																																																
單位 (UNIT)	MM																																																																																
公差 (TOLERANCE) X. X ±0.38 X. XX ±0.25 X. XXX ±0.05																																																																																	
投影法 (PROJECTION)		A	2019-11-06	ZENG	LIU	HU																																																																											
		REV.	DATE	RAWN	CHECKED	APPRDVED																																																																											
FLYING INTERNATIONAL		PIN HEADER																																																																															
		1.27PH 90° H:1.50																																																																															
		1*XXPIN																																																																															
圖號 (DRAW NO.)																																																																																	
	1	2	3	4	5	6	7	8																																																																									