

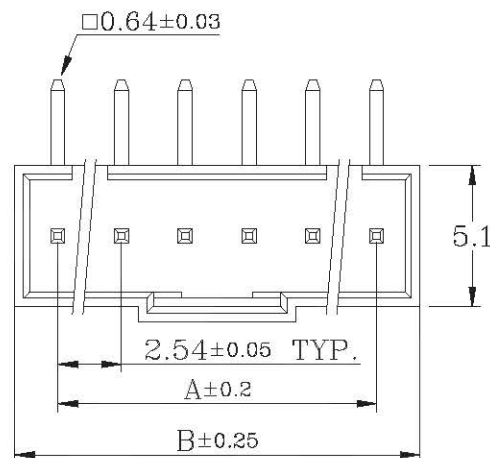

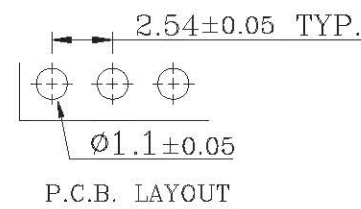


2 Circuit

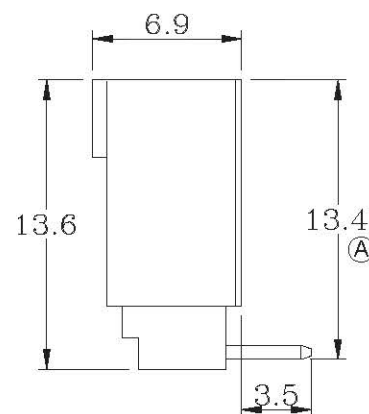

3 Circuit

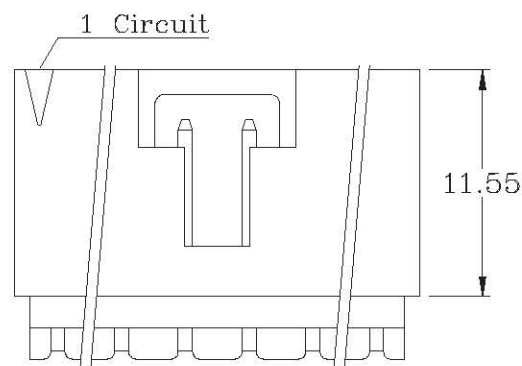

所有材料為
"環保材料"
2006.7.27
RoHS

Specifications:

- Material:
- Base: Polyester 94V-0, PBT+30% glass-filled
- Contact: Brass, Gold-Plated
- Voltage Rating: 250V
- Current Rating: 3A
- Withstand Voltage: 1000V AC/Minute
- Insulation Resistance: 1000MΩ min.
- Temperature Range: -25°C~+85°C
- Contact Resistance: Initial value/10mΩ max.
After environmental testing/20mΩ max.

Dimensional & Ordering Information:

Circuits	Part No	Dimensions mm	
		A	B
2	CPU-02	2.54	7.62
3	CPU-03	5.08	10.16
4	CPU-04	7.62	12.70
5	CPU-05	10.16	15.24
6	CPU-06	12.70	17.78
7	CPU-07	15.24	20.32
8	CPU-08	17.78	22.86
9	CPU-09	20.32	25.40
10	CPU-10	22.86	27.94
11	CPU-11	25.40	30.48
12	CPU-12	27.94	33.02

FLYiNG

DESCRIPTION(內容):
2.54mm (.100") Pitch
Wire-to-Board Header

PART NO:
(料 號) CPU-XX
DWG NO(圖號): 2545-RT

DRAWN(製圖):

mini

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

.000 : ±0.08

.00 : ±0.13

.0 : ±0.25

SCALE(比例):

FREE

REV:

R2

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE(RoHS) & DIP標示位置更正

修改接觸阻抗單位

2007年圖面版本更新

變更電鍍成份 (Tin→Gold)

補充尺寸(A)

DATE

2006.07.27

2006.11.18

2007.10.09

2008.05.08

2008.12.26

