



SPECIFICATIONS

Rated Current:2.0AMP
Contact Resistance:30mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

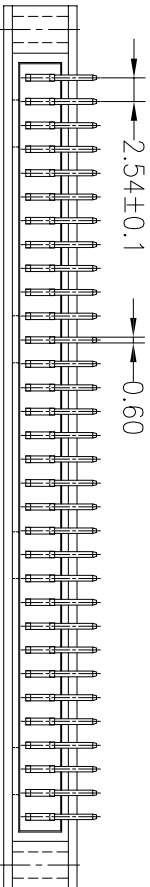


Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PBT
Max.Processing Temp: 180°C for 30−60 seconds
(200°C for 10 seconds)

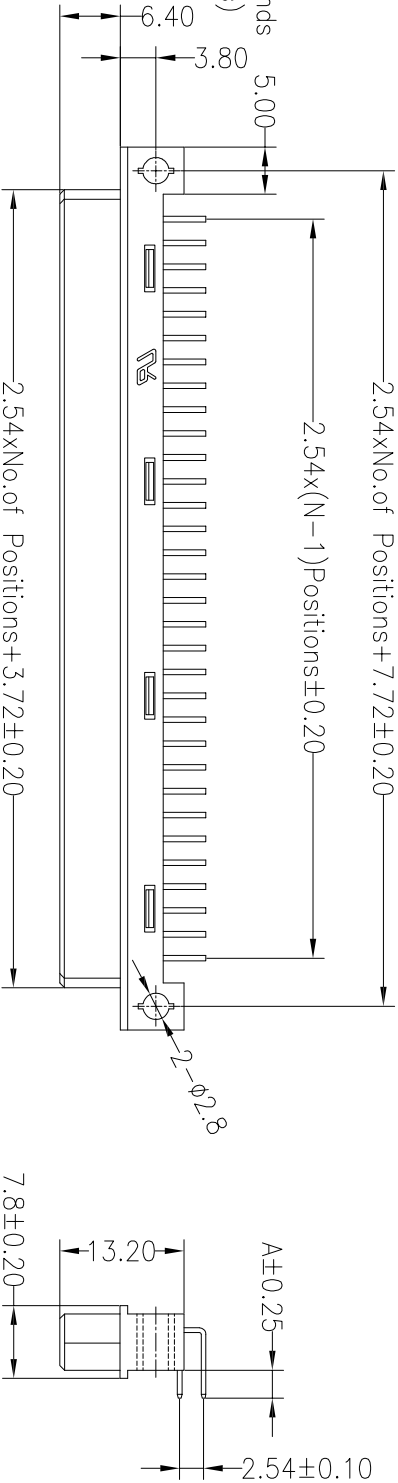

Ordering Information

3511 2 XX B F R XX B NA1

No.of Pins
16~64P
Contact Type
M=male
F=Female
Contact Plating
G0:Gold Flash
S0:Gold Flash/Tin
S1:2U" Gold/Tin
S2:5U" Gold/Tin
S3:10U" Gold/Tin
S4:15U" Gold/Tin
S5:30U" Gold/Tin
SN:Tin

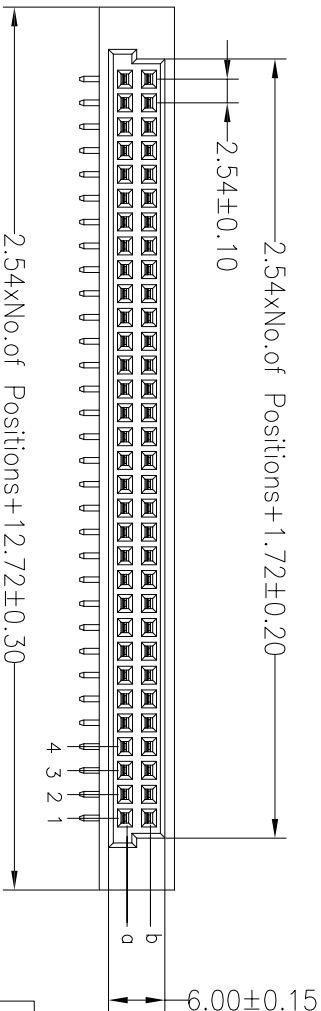

Dimension antitheses list		
ITEM	A	
Standard	2.90	
Alternate		

				OPERATION		DRAW	YTYuSheng	15.04.23	SCALE		FIT	FLYING	
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK			SIZE	A4			
				X.XXX	±0.10				SHEET	1/1			
A0	2015.04.23	NEW DRAWING		Angle	±3°	APPROVE			PROJ.		TITLE:		DIN 41612 90° NPIN Female
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL								