

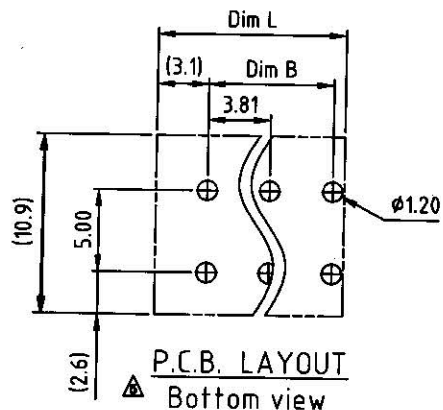
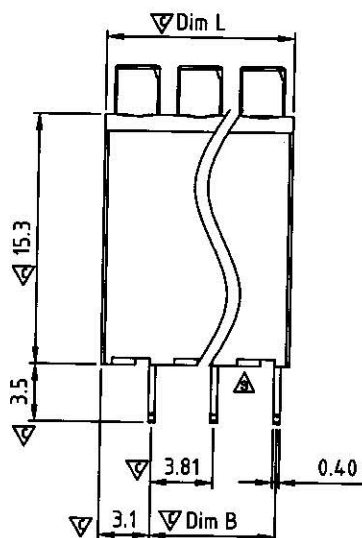




△ The color of lever is consistent with body's

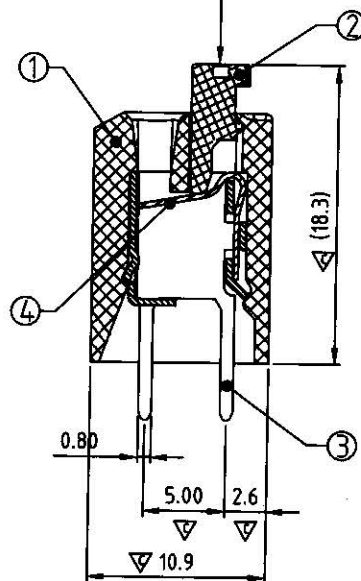

N = Number of poles

Dim L = N x 3.81

Dim B = (N-1) x 3.81

	Dim L	Dim B
2-6p	±0.15	
7-12p	±0.20	
13-18p	±0.25	
19-24p	±0.30	

SIGN	DATE	DESCRIPTION	APPROVER
△	01/27/07	The Soldering temperature from 245° to 250°	Aaron
△	01/27/07	Add "VDE" stipulation	Aaron
△	8/6/07	The body bottom is changed.	Marvin
△	06/05/13	change the electrical specification	Da cheng
△	05/12/14	changed the structure of lever ///update the drawing	Da cheng

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item 1 Insulating body : Thermoplastic (UL94V-0)
- Item 2 Insulating lever : Thermoplastic (UL94V-0)
- Item 3 Contact pin : Brass, Tin plated
- Item 4 Spring clamp : Stainless steel

Electrical	cULus	TUV
● Voltage rating:	300V	500V
● Current rating:	8A	10A
● Wire range:	0.5-1.5mm ²	
● Solid wire(AWG):	16-20	
● Stranded wire(AWG):	16-20	
● Wire strip length:	8-9mm	
● Withstanding Voltage:	1.6KV	1.89KV
● Operating temperature:	-40°C to +115°C	
● Soldering temperature:	260°C±5°C/5 Sec	
● Safety Approval:	cULus	△ TUV
● Critical dimension:	▽	



HV xx 30 x 0 xxxx G			RoHs compliant (lead<4%) In copper Alloy
Poles	Color	0000 Standard @ Logo	
02 2Contacts	8 Grey (RAL 7004/P)	000A Standard ANY Logo	
03 3Contacts	9 Orange	Any special item by customer request, please contact sales department.	
24 24Contacts			

FLYiNG				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE		HV-3.81mm Series		DWG NO.		8HV0001	
PART NO.		HVxx30x0xxxxG		DWG NO.		8HV0001	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
		Da cheng	Da cheng		X. ±0.50		
		2014.05.12	2014.05.12		X.X ±0.30		
SHEET: 01/01				UNIT: mm	X.XX ±0.10		
				SCALE: NONE	X* ±1°		
				REV: H			