



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C



Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

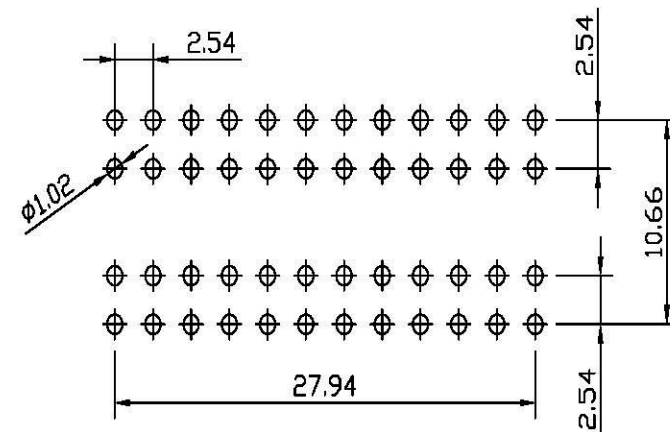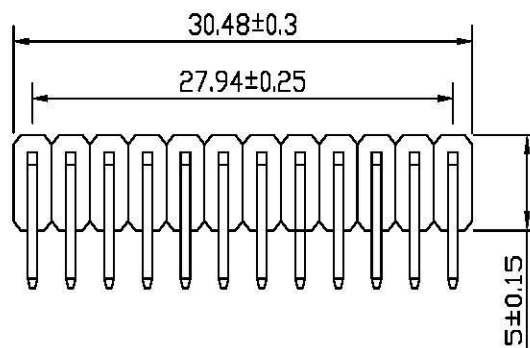

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Ordering Information

1225-1 2 1 2 X N XX U XXX X 01



No. of Pins
Per Row
1x40
2x40
3x40
1-40
2-80
3-120

Insulator Material
Option
A=BK-PBT
C=BK-PA6T
D=BK-PA46
E=BK-PA9T
F=BK-LCP

Contact Plating
G0:Gold Flash
G1:1U" Gold
G2:1.5U" Gold
G3:2U" Gold
G4:3U" Gold
G5:5U" Gold
G6:10U" Gold
G7:15U" Gold
S0:Gold Flash/Tin
SN:Tin

Pin Length

Packing
O=PE Bag
A=Tray
T=Tube
P=Tube+Cap
R=Reel+Cap
M=Reel+Mylar

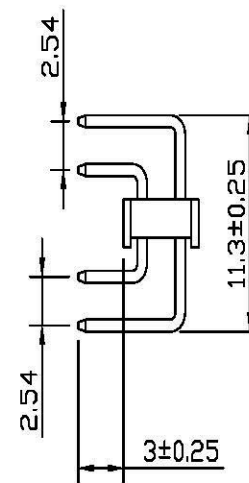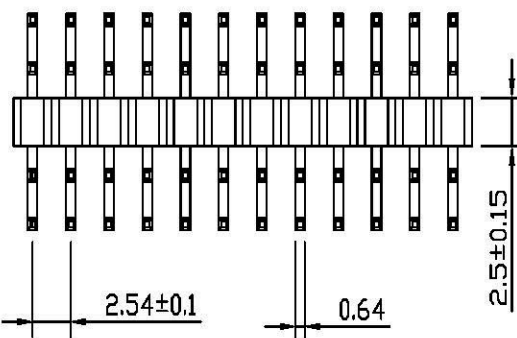

Dimension antitheses list

ITEM	PC	W	L短	L长
Alternate	3.00	11.3	13.5	23.5

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

YiYuSheng

19.04.11

SCALE

FIT

UNIT mm

SIZE A4

SHEET 1/1

PROJ.

SCALE

FIT

UNIT mm

SIZE A4

SHEET 1/1

PROJ.

PART NO.

TITLE:

FLYiNG

12251212XNXXUXXXX01

2.54PH H2.5 Dual Row 90° 两边弯

A0 2019.04.11 NEW DRAWING

REV DATE MODIFICATION DESCRIPTION

CHANGE