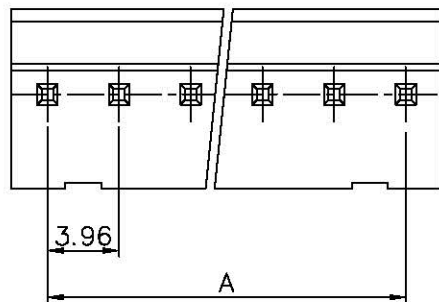


RECOMMENDED P.C.BOARD HOLE DIMM.

SPECIFICATIONS

Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: -25°C ~ +85°C



Insulation Resistance: 1000MΩ/ min.

Dielectric Withstanding Voltage: 1500V AC/ min.

Contact Resistance: 10mΩ/ max.

Material

Material: Nylon66, UL94V-2.

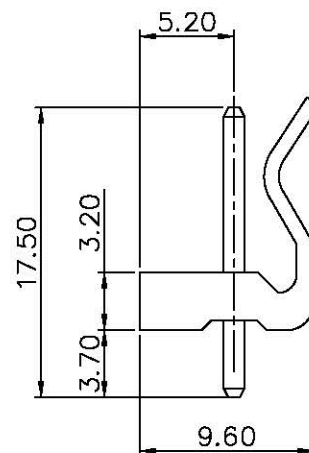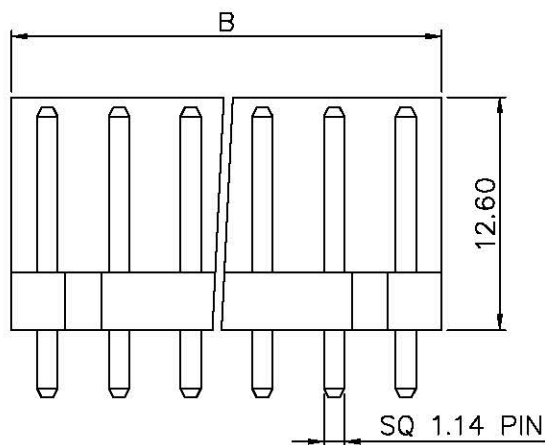

Poles	Dimension(mm)		Part No.	Note.
	A	B		
02	3.96	7.92	CW-W396-02	
03	7.92	11.88	CW-W396-03	
04	11.88	15.84	CW-W396-04	
05	15.84	19.80	CW-W396-05	
06	19.80	23.76	CW-W396-06	
07	23.76	27.72	CW-W396-07	
08	27.72	31.86	CW-W396-08	
09	31.86	35.64	CW-W396-09	
10	35.64	39.60	CW-W396-10	
11	39.60	43.56	CW-W396-11	
12	43.56	47.52	CW-W396-12	

FLYING
INTERNATIONAL

DESCRIPTION(内容):

**3.96mm Wire-to-Board Header
Dip 180° Type (RoHS)**

PART NO:
(料 號) **CW-W396-XX**

DWG NO(圖號): **3961-XX-ST**

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

X.XX ±0.35

X.X ±0.5

SCALE(比例):

FREE



REV:

R5

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R2

R3

R4

R5

DESCRIPTION

更改環保章字樣

13PIN-20PIN無生產
2014年8月料號P數總碼統一兩碼

圖面更新&新增PIN針尺寸

更換確認章

DATE

2006.09.05

2015.06.10

2015.07.24

2020.02.17